Dude my dude.

Another talk about CSS?

What's to know?

CSS is fraggin easy.

```
.box {
  width: 100px;
  height: 100px;
  background: red;
}
```

Wow that's so hard.

It's a red box.

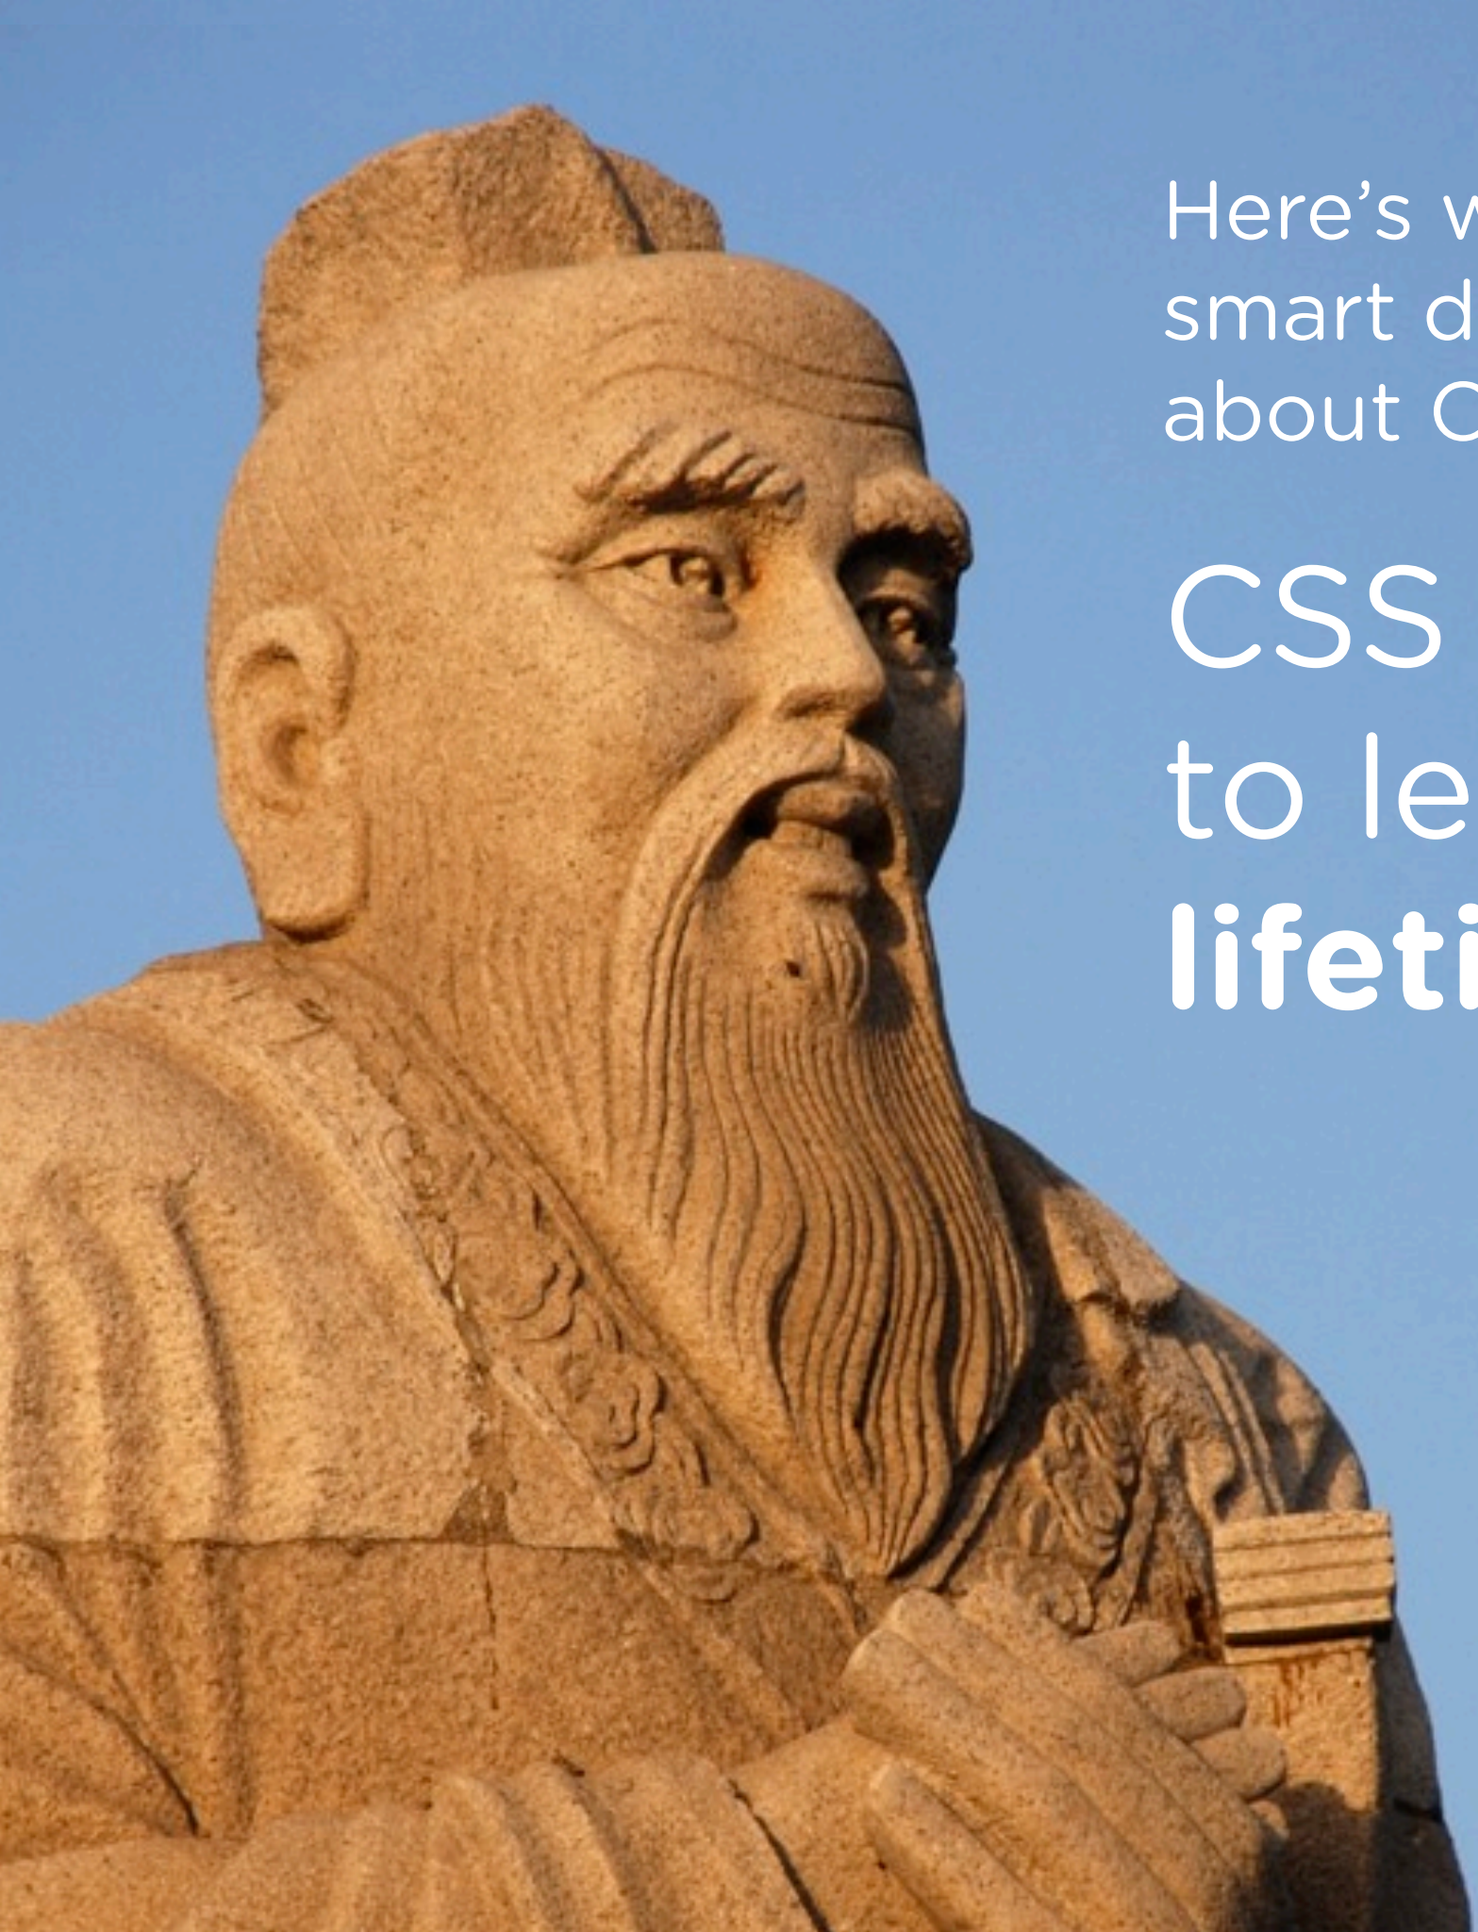

Here's what some super smart dude once pontificated about CSS.

CSS takes a **day** to learn but a **lifetime** to master.

The Royal We

Chris Coyier @chriscoyier

The Royal We

Chris Coyier @chriscoyier

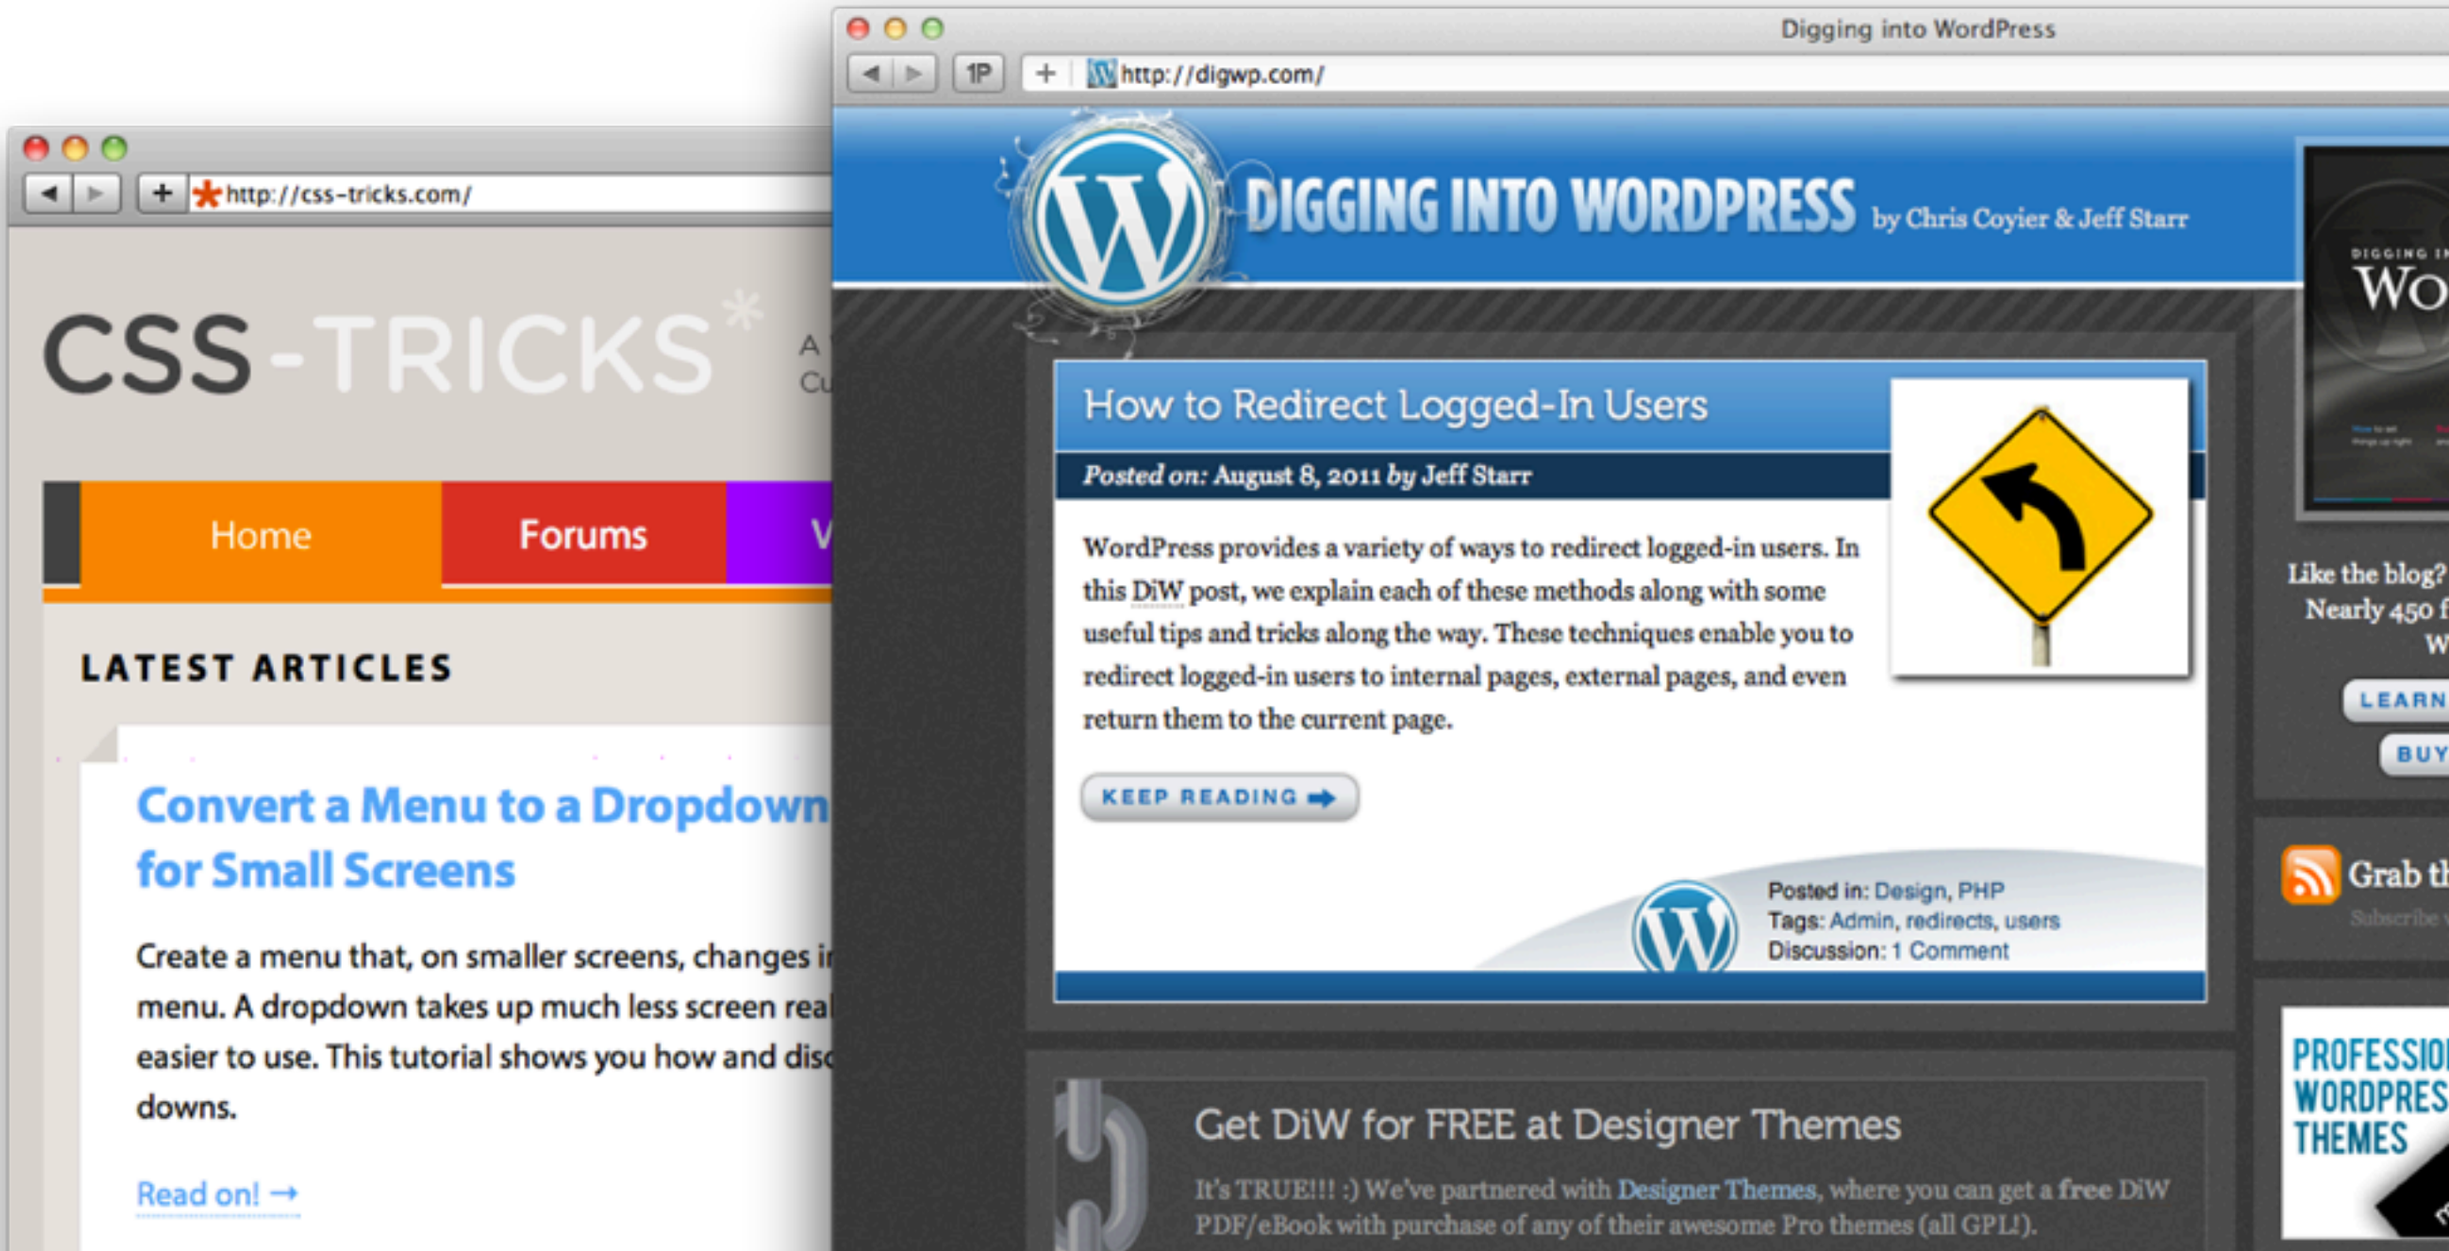

(CSS) Pseudo Elements

For fun and profit!

Here's what we are going to learn:

1) What they are

2) How to use them (syntax)

3) Why they are cool (theoretically)

4) Why they are cool (in practice)

5) WordPress doesn't really care about your CSS.

Can I use this with WordPress?! ***Yes.***

You already know how to use them!

“Pseudo Class Selectors”

:visited **:hover** :active :link

:first-child :last-child :nth-child() :nth-of-type()

:enabled :disabled :checked :indeterminate

:focus :target :root :lang()

http://css-tricks.com/pseudo-class-selectors/

:before

:after

HTML

```
<div>In</div>
```

CSS

```
div:before {
  content: "Robots ";
}
```

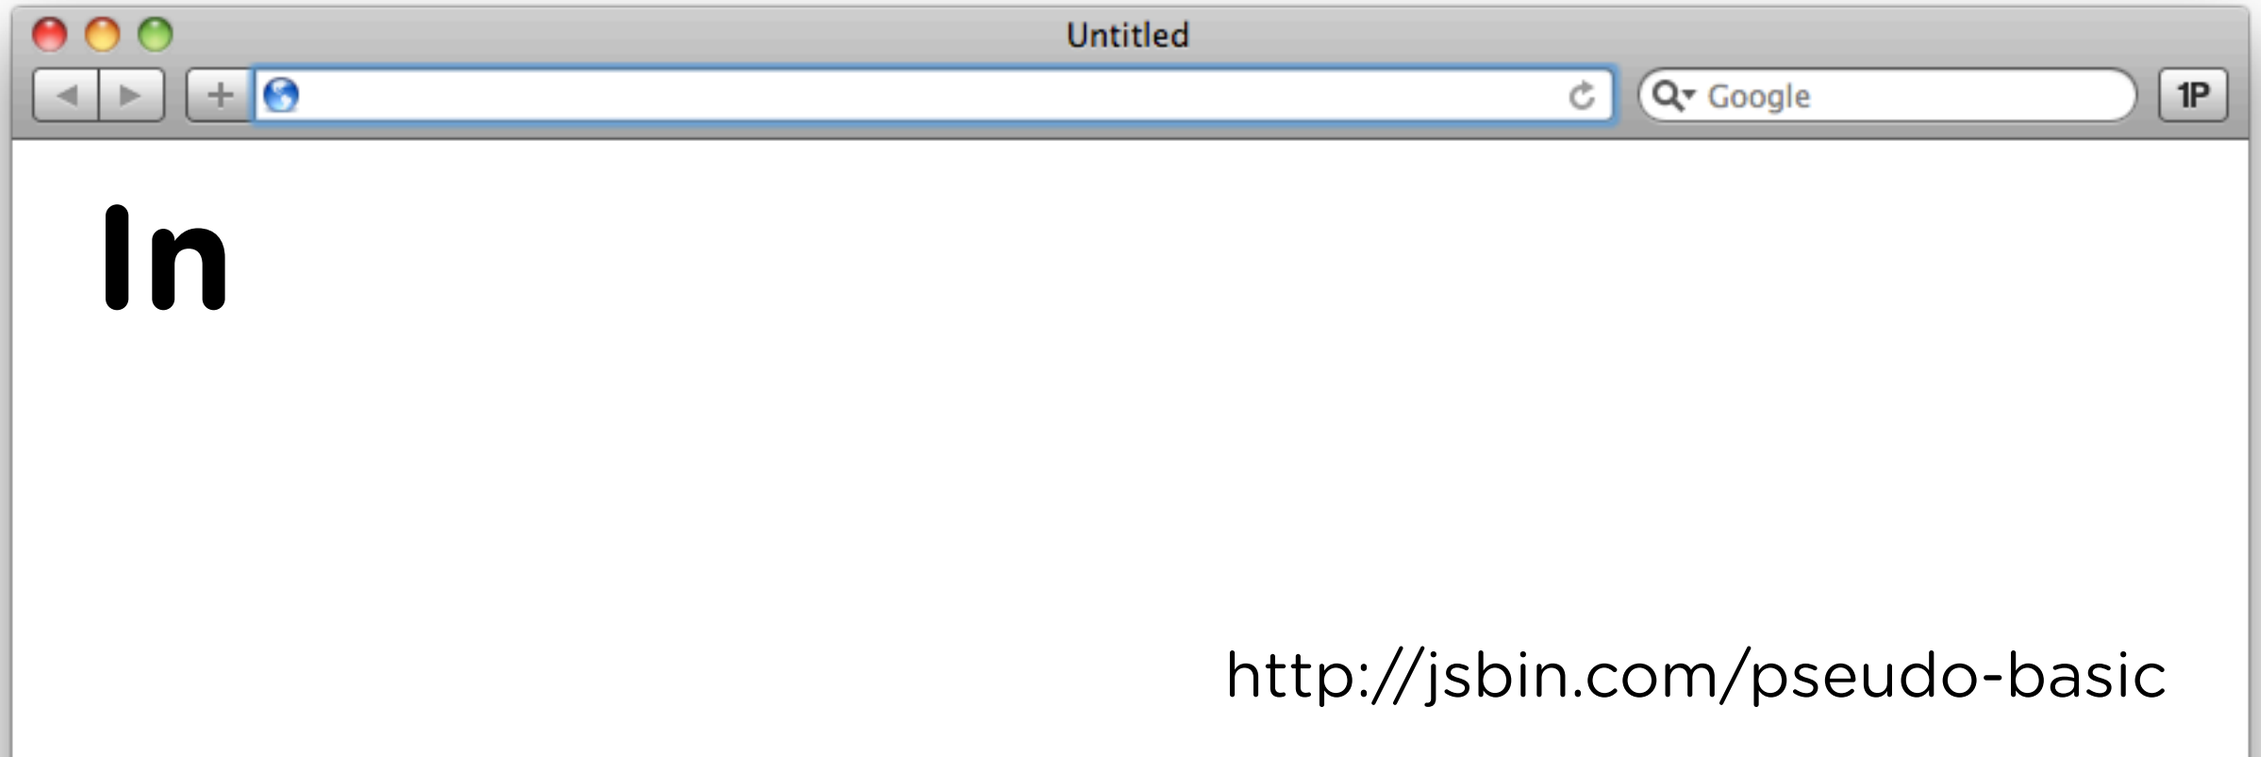

http://jsbin.com/pseudo-basic

HTML

```
<div>In</div>
```

CSS

```
div:before {
  content: "Robots ";
}
div:after {
  content: " Disguise";
}
```

http://jsbin.com/pseudo-basic

So what's with the different name?

Pseudo *selectors* select elements that **already exist** (perhaps in different states).

Pseudo *elements* create new content that **doesn't exist (yet)**.

Pseudo Elements

~~THE OCEAN~~ DOESN'T MAKE RUINS, IT MAKES NEWONES.

http://www.youtube.com/watch?v=_naLuRykun8

::before

::after

::first-line ::first-letter

:before

:after

:first-line :first-letter

HTML

```
<article class="post" id="13467">
   <h2>Best article eva!!</h2>
   <p>Dogs are better than cats. Fact.</p>
</article>
```

CSS

```
article:before {
  content: "Robots ";
}

article:after {
  content: " Disguise";
}
```

HTML

Robots

```
<article class="post" id="13467">
    <h2>Best article eva!!</h2>
    <p>Dogs are better than cats. Fact.</p>
</article>
```

Disguise

Not “before/after the element”…

Resulting HTML (sorta)

```
<article class="post" id="13467">
   Robots
   <h2>Best article eva!!</h2>
   <p>Dogs are better than cats. Fact.</p>
   Disguise
</article>
```

It's before/after the content inside.

It’s only a model…
(Not really in DOM)

Not for “no content” elements

```
<img src="robot.jpg" alt="Robot">
<input type="email" name="email" />
<br>
```

- Allows but shouldn’t
- Styles as if was inside

- Checkboxes
- Radio Buttons

HTML

```
<blockquote>Graphic design will save the world right
after rock and roll does.</blockquote>
```

CSS

```
blockquote:before {
  content: "\201C";
}

blockquote:after{
  content: "\201D";
}
```

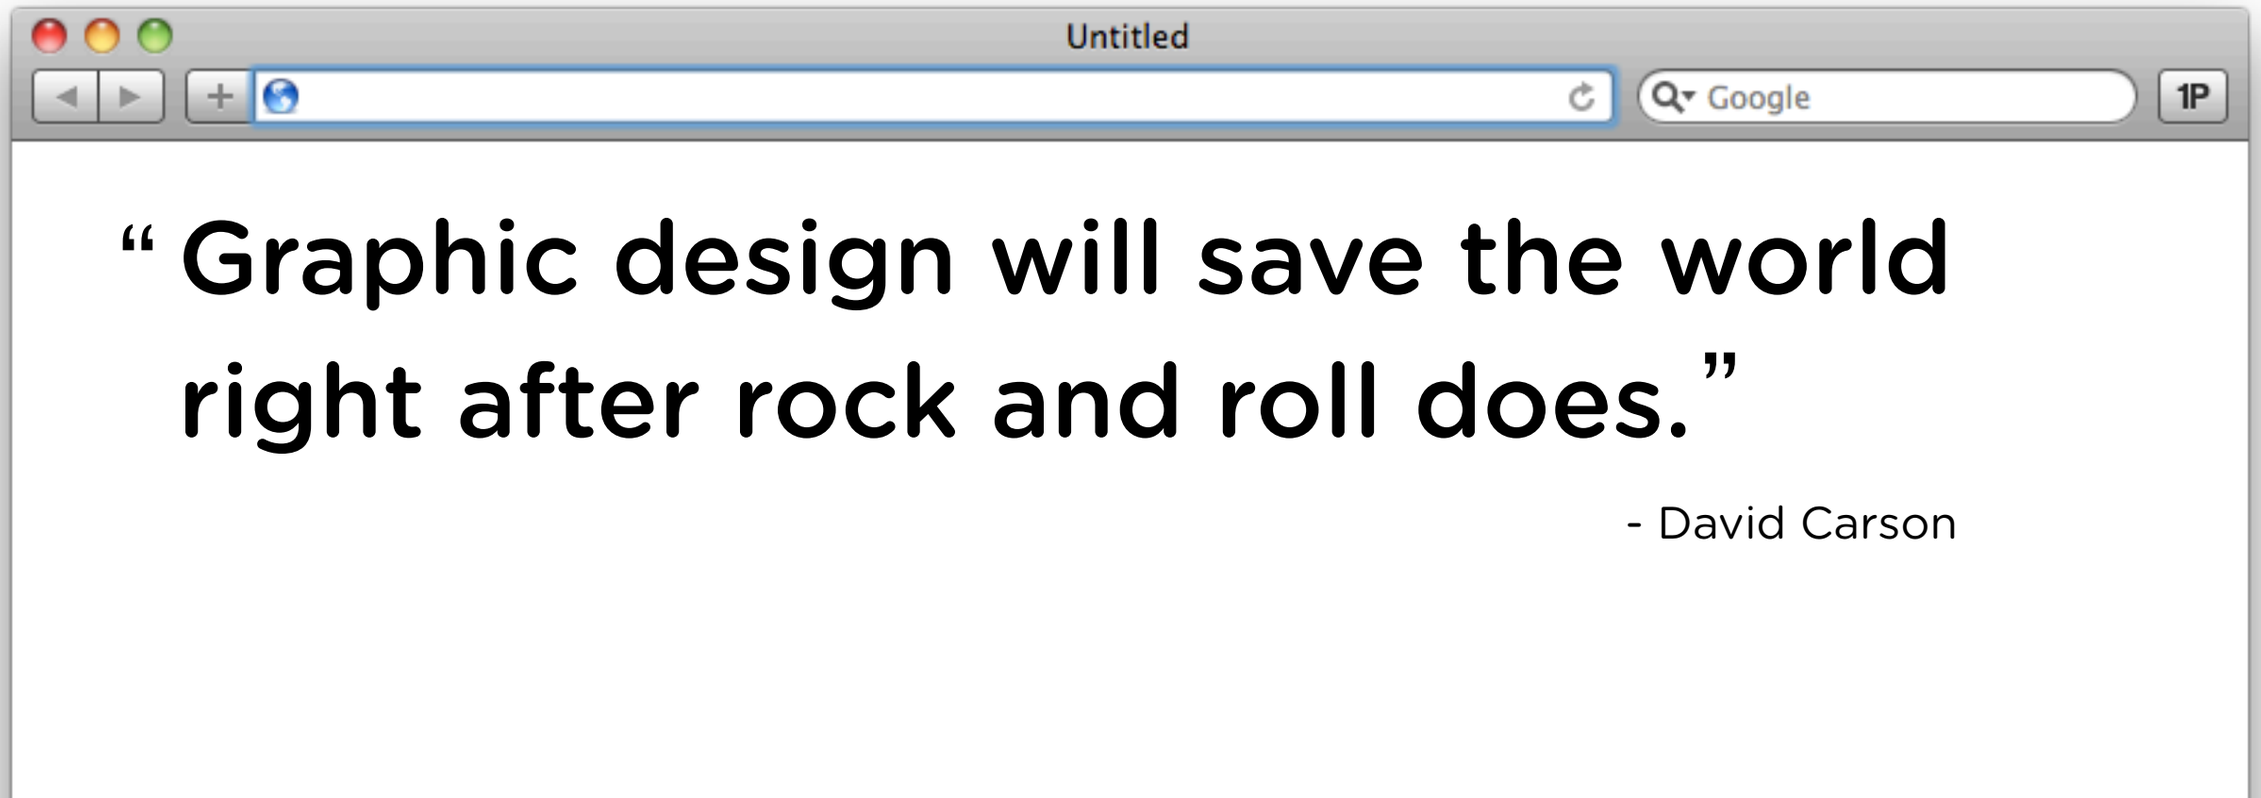

RABBLE RABBLE RABBLE!

Quotes on Design

http://quotesondesign.com/

QUOTES on DESIGN

curated by CHRIS COYIER

GET ANOTHER!

ARCHIVES

RSS FEED

THE API

WIDGETS

GOT ONE?

Search

A friend once insisted to me that the plural of "moron" is "focus group."

— ETHAN MARCOTTE

[PERMALINK]

[TWEET THIS]

Go to "http://quotesondesign.com/"

HTML

```
<blockquote>Graphic design will save the world right
after rock and roll does.</blockquote>
```

CSS

```
blockquote:before {
  content: "\201C";
  position: absolute;
  top: 0; left: -30px;
  font-size: 60px; color: #999;
}
```

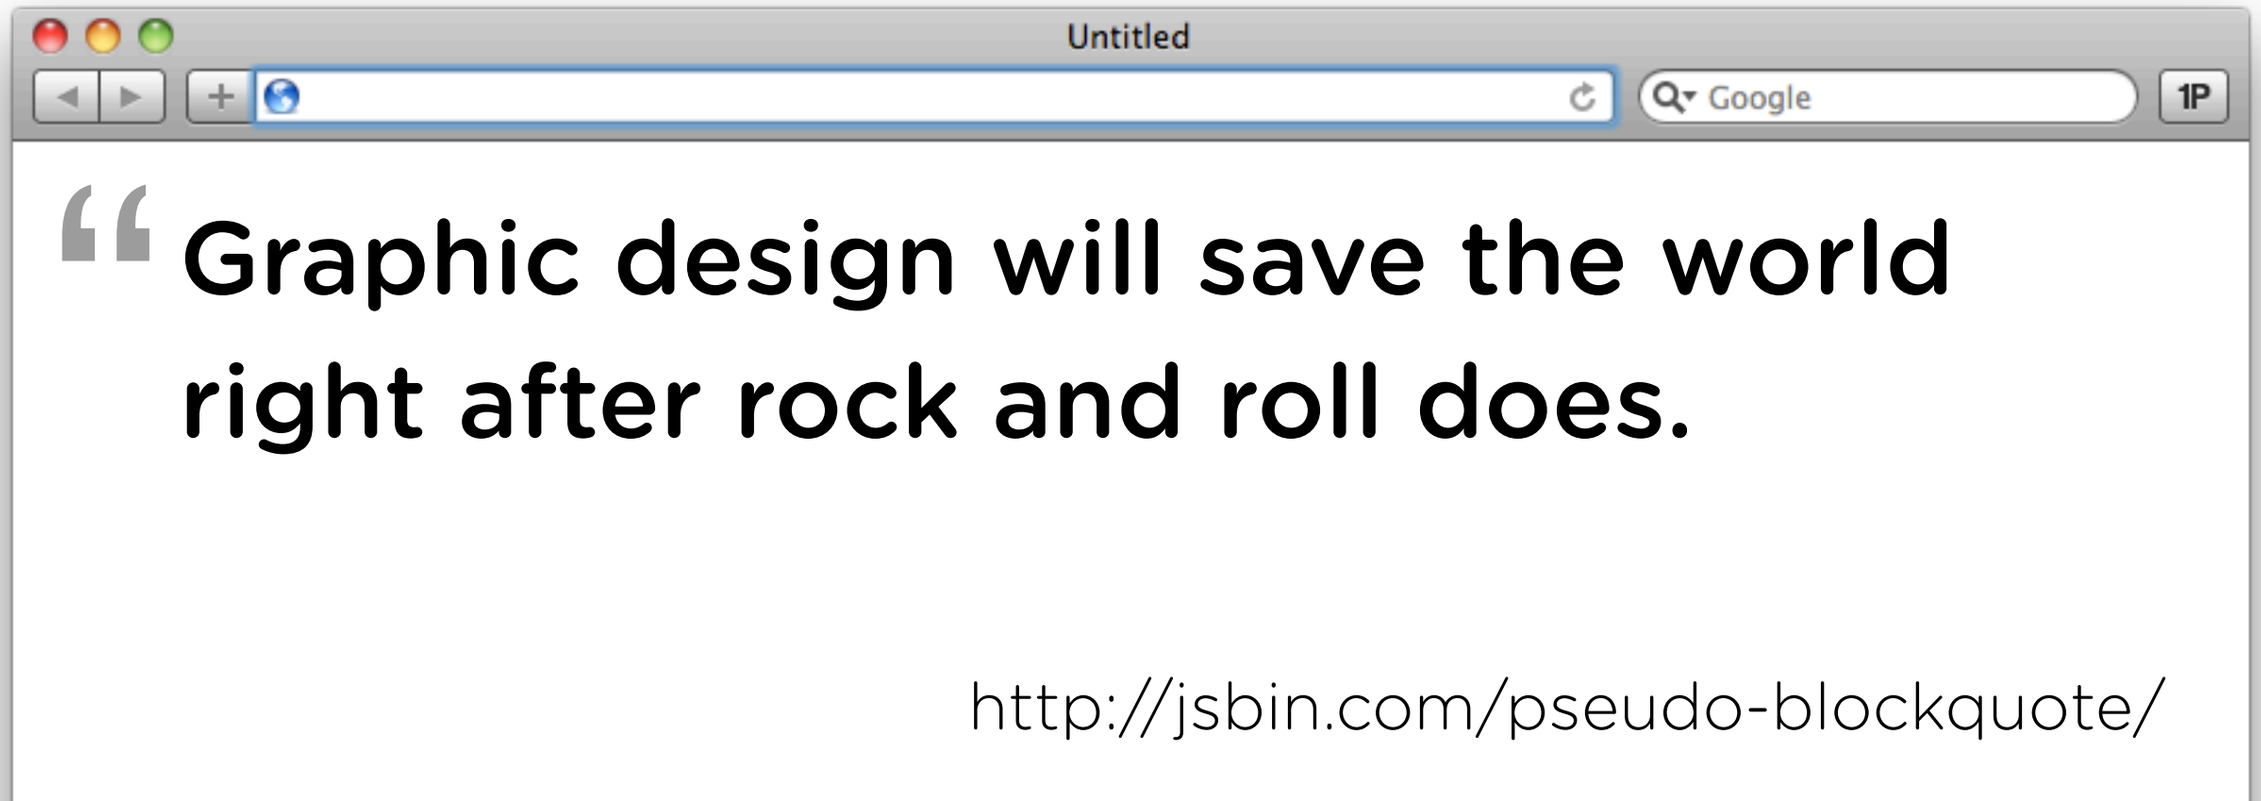

Edit Post ‹ Local WordPress — WordPress

http://localwordpress.whatup/wp-admin/post.php?post=40&action=edit&message=6

Local WordPress — Search Engines Blocked

New Post | Howdy, chriscoyier | Log Out

WordPress 3.2.1 is available! Please update now.

Screen Options | Help

- Dashboard
- Posts
  - Posts
  - Add New
  - Categories
  - Post Tags
- Media
- Links
- Pages
  - Pages
  - Add New
- Comments
- Slides
  - Slides
  - Add New Slide
  - Slide Categories
- Appearance
- Plugins 1
- Users
- Tools
- Settings
  - General
  - Writing
  - Reading
  - Discussion
  - Media
  - Privacy
  - Permalinks
  - AnythingSlider

Edit Post

Post published. View post

Awesome Blockquote

Permalink: http://localwordpress.whatup/?p=40 Change Permalinks View Post

Upload/Insert

Visual | HTML

B I ABC

> *Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas.*

> *Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas.*

Path:

Word count: 26 — Last edited by chriscoyier on August 8, 2011 at 10:55 pm

Publish

Preview Changes

Status: **Published** Edit

Visibility: **Public** Edit

Published on: **Aug 8, 2011 @ 22:55** Edit

Move to Trash — Update

Format

- (•) Standard
- ( ) Aside
- ( ) Gallery

Categories

All Categories | Most Used

- [x] Uncategorized

+ Add New Category

Post Tags

Edit Post ‹ Local WordPress — WordPress

http://localwordpress.whatup/wp-admin/post.php?post=40&action=edit&message=6

Local WordPress Search Engines Blocked

New Post | Howdy, chriscoyier | Log Out

- Dashboard
- Posts
  - Posts
  - Add New
  - Categories
  - Post Tags
- Media
- Links
- Pages
  - Pages
  - Add New
- Comments
- Slides
  - Slides
  - Add New Slide
  - Slide Categories
- Appearance
- Plugins 1
- Users
- Tools
- Settings
  - General
  - Writing
  - Reading
  - Discussion
  - Media
  - Privacy
  - Permalinks
  - AnythingSlider

WordPress 3.2.1 is available! Please update now.

Screen Options | Help

Edit Post

Post published. View post

Awesome Blockquote

Permalink: http://localwordpress.whatup/?p=40 Change Permalinks View Post

Upload/Insert

Visual | HTML

b | i | link | b-quote | del | ins | img | ul | ol | li | code | more | lookup | close tags

```
<blockquote>Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas.
</blockquote>
```

Word count: 26 Last edited by chriscoyier on August 8, 2011 at 10:55 pm

Publish

Preview Changes

Status: **Published** Edit

Visibility: **Public** Edit

Published on: **Aug 8, 2011 @ 22:55** Edit

Move to Trash Update

Format

- (•) Standard
- ( ) Aside
- ( ) Gallery

Categories

All Categories | Most Used

- [x] Uncategorized

+ Add New Category

Post Tags

Local WordPress

http://localwordpress.whatup/?p=40

Edit Post ‹ Local WordPress — Wo... | Local WordPress

chriscoyier | Edit Post | Add New | Comments | Appearance | Updates 1 | Search

Local WordPress

Just another WordPress site

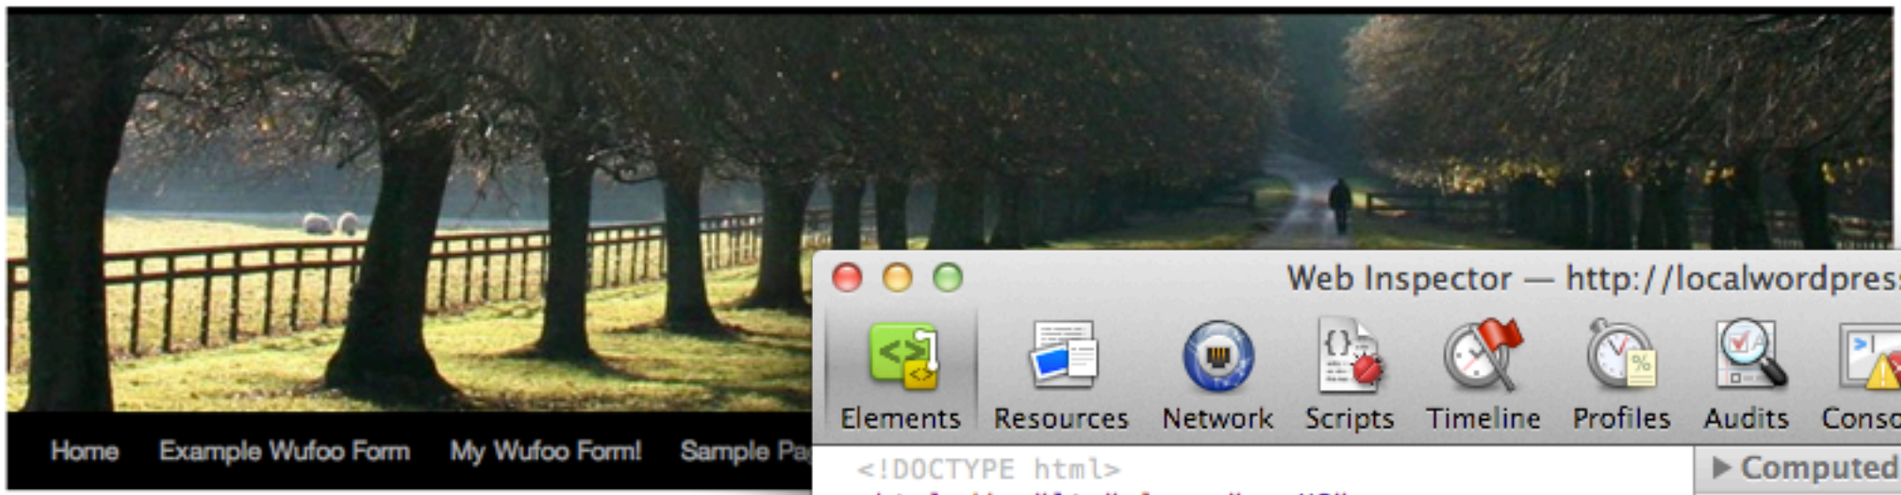

Home | Example Wufoo Form | My Wufoo Form! | Sample Pa

← Slider of Dog

Posted on August 8, 2011 by chriscoyier

Pellentesque habitant morbi tristique senectus
fames ac turpis egestas.

Pellentesque habitant morbi tristique senectus
fames ac turpis egestas.

This entry was posted in Uncategorized. Bookmark the permalink. Edit

← Slider of Dog

Leave a Reply

Logged in as chriscoyier. Log out?

Comment

Web Inspector — http://localwordpress.whatup/?p=40

Elements | Resources | Network | Scripts | Timeline | Profiles | Audits | Console

```
<!DOCTYPE html>
▼<html dir="ltr" lang="en-US">
  ▶<head>…</head>
  ▼<body class="single single-post postid-40
    single-format-standard logged-in admin-bar">
    ▼<div id="wrapper" class="hfeed">
      ▶<div id="header">…</div>
       <!-- #header -->
      ▼<div id="main">
        ▼<div id="container">
          ▼<div id="content" role="main">
            ▶<div id="nav-above" class=
             "navigation">…</div>
             <!-- #nav-above -->
            ▼<div id="post-40" class="post-40
             post type-post status-publish
             format-standard hentry category-
             uncategorized">
              <h1 class="entry-title"></h1>
              ▶<div class="entry-meta">…</div>
               <!-- .entry-meta -->
              ▼<div class="entry-content">
                ▼<blockquote>
                  ▶<p>…</p>
                  ▶<p>…</p>
                 </blockquote>
               <!-- .entry-content -->
              ▶<div class="entry-
```

Computed Style

Styles

```
element.style {

}
```

Matched CSS Rules

```
blockquote {
   font-style: italic;
 ▶ padding: 0 3em;
}

blockquote {
   quotes: none;
}

html, body, div, span, applet,
iframe, h1, h2, h3, h4, h5, h6
a, abbr, acronym, address, big
dfn, em, font, img, ins, kbd,
strike, strong, sub, sup, tt,
dl, dt, dd, ol, ul, li, fields
legend, table, caption, tbody,
td {
 ▶ background: transparent;
 ▶ border: 0;
 ▶ margin: 0;
 ▶ padding: 0;
   vertical-align: baseline;
}
```

HTML

```
<blockquote>
   <p>Graphic design will save the world right after rock
and roll does.</p>
   <p>Another example paragraph</p>
</blockquote>
```

CSS

```
blockquote p:first-child:before {
   content: "\201C";
}
blockquote p:last-child:after {
   content: "\201D";
}
```

HTML

```
<h1></h1>
<h2></h2>
```

CSS

```
h1:before {
    content: “CSS-Tricks”;
}
h2:before {
    content: “A web design community.”;
}
```

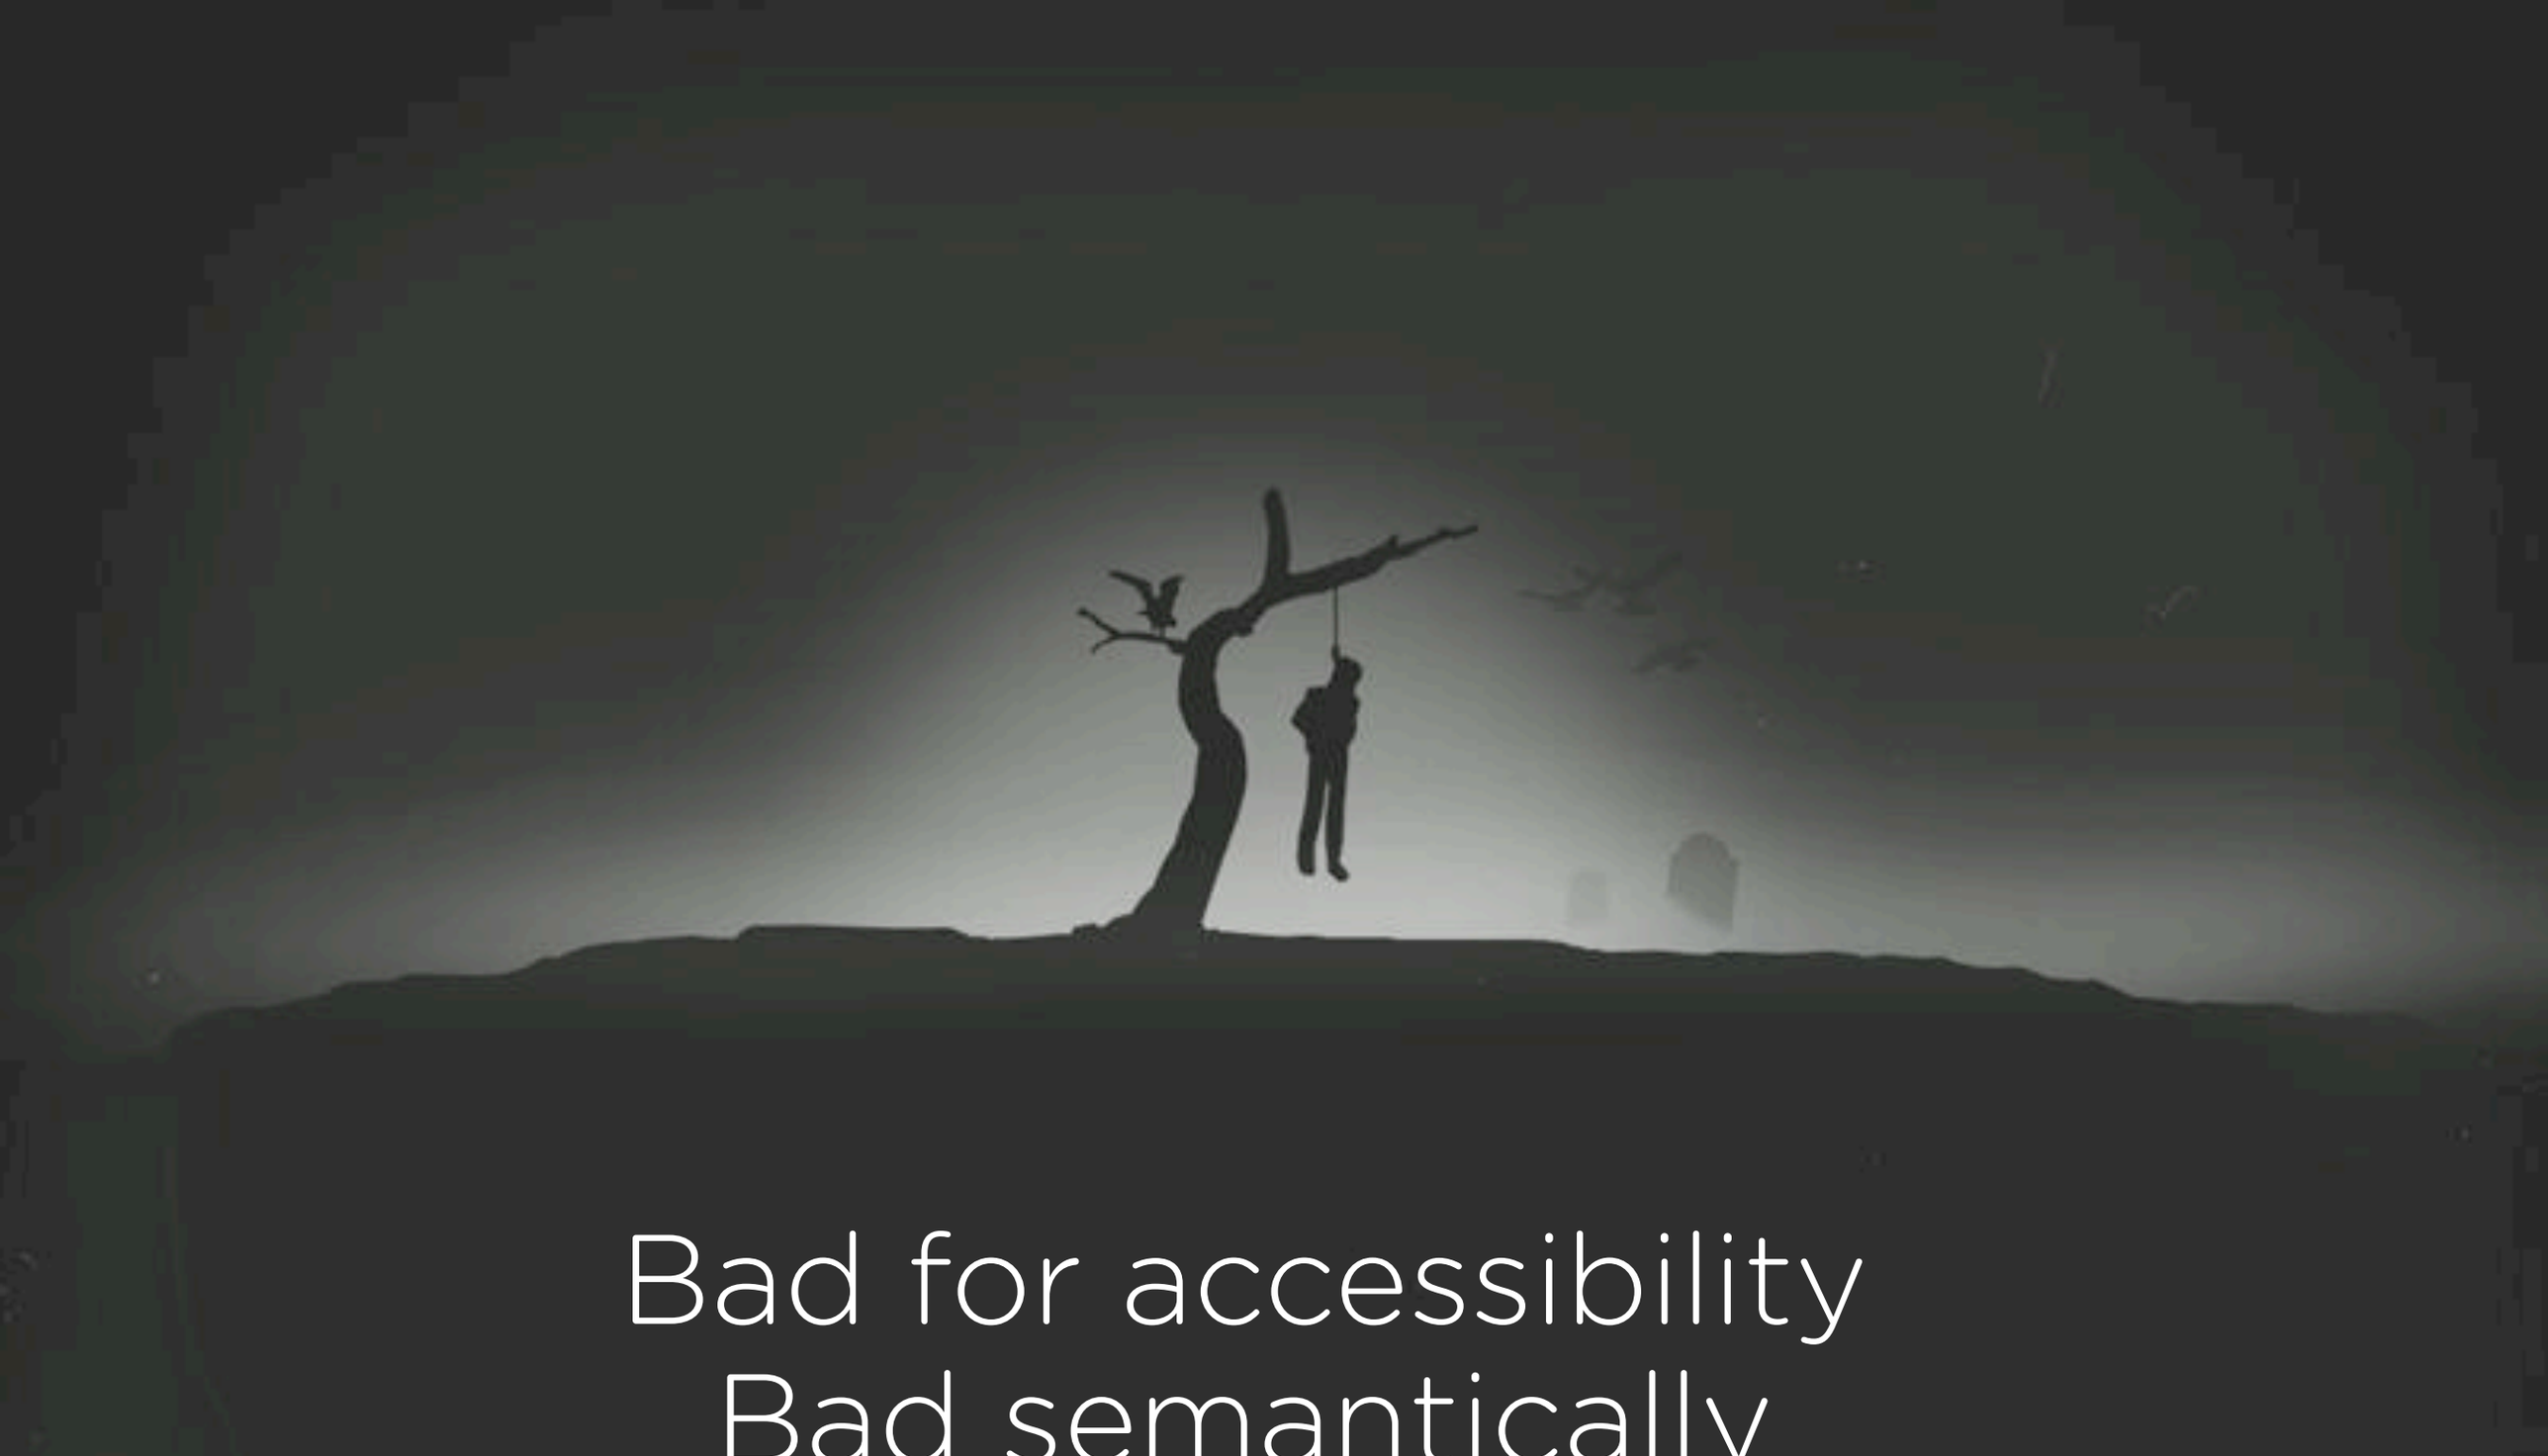

Bad for accessibility
Bad semantically
Bad for SEO

Screen Readers

NVDA	**don't read**
Jaws	**don't read**
Window Eyes	**don't read**

Testing by Lucica Ibanescu

http://cssgallery.info/testing-the-accessibility-of-the-css-generated-content/

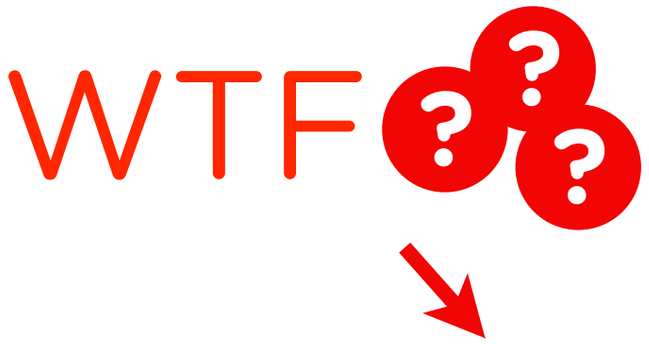

content: "\201C";

CSS takes **unicode entities** (\0026)

... as opposed to ...

named entities (&) or
numeric entities (&)

Hot tip: Need a new line? Use “\A”

Named entities, numeric entities and ISO numeric codes

Special characters for (X)HTML

"	"	"	quotation mark, a.k.a. apl quote	u+0022 ISOnum	p:before { content:"\0022"; }	alert("\42")
&	&	&	ampersand	u+0026 ISOnum	p:before { content:"\0026"; }	alert("\46")
&lt ;	<	<	less-than sign	u+003C ISOnum	p:before { content:"\003c"; }	alert("\74");
&gt ;	>	>	greater-than sign	u+003E ISOnum	p:before { content:"\003e"; }	alert("\76");

Latin-1 entity set for HTML

Name		Numeric	Description	Hex	ISO in CSS content	Octal
			no-break space	%A0	p:before { content:"\00a0"; }	alert("\240");
¡	¡	¡	inverted exclamation mark	%A1	p:before { content:"\00a1"; }	alert("\241");
¢	¢	¢	cent sign	%A2	p:before { content:"\00a2"; }	alert("\242");
£	£	£	pound sterling sign	%A3	p:before { content:"\00a3"; }	alert("\243");
¤	¤	¤	general currency sign	%A4	p:before { content:"\00a4"; }	alert("\244");
¥	¥	¥	yen sign	%A5	p:before { content:"\00a5"; }	alert("\245");
¦	¦	¦	broken (vertical) bar	%A6	p:before { content:"\00a6"; }	alert("\246");
§	§	§	section sign	%A7	p:before { content:"\00a7"; }	alert("\247");
¨		¨	umlaut (dieresis)	%A8	p:before { content:"\00a8"; }	alert("\250");

http://www.evotech.net/blog/2007/04/named-html-entities-in-numeric-order/

content can be …

1) Text

```
div:after {
  content: “----------”;
}
```

2) Image

```
div:after {
  content: url(smiley.png);
  /* or gradient */ }
```

3) Attribute

```
div:after {
  content: attr(data-tip);
}
```

4) Counter

```
ol > li:after {
  content: counter(li);
}
```

or, nothing!

```
content: “”;
```

but not HTML

```
content: “<h1>WordCamp!!</h1>”;
```

LATEST ARTICLES

Fun With Blurred Text

4/21/2011
13 Comments

We'll cover how to blur text with CSS3 and do it safely by feature-detecting first. Then we'll do a bunch of experiments with individual letter blurring and also some clever jQuery which gives us deeper access into specific values of a text-shadow.

Read on! →

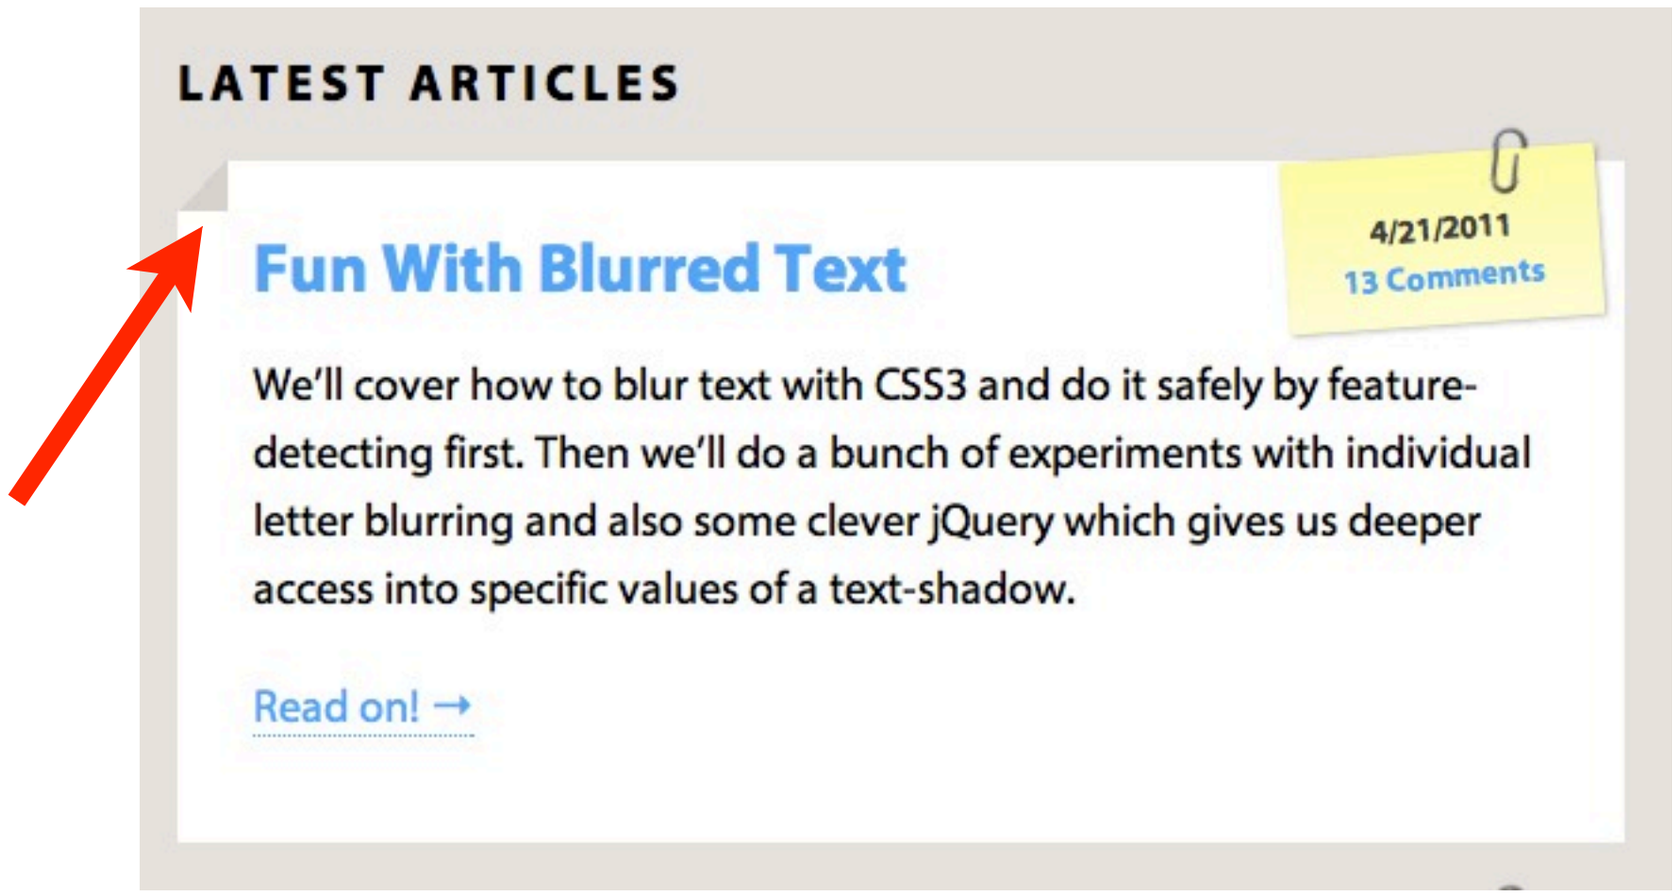


```
<article>
  <h2>Fun with Blurred Text</h2>
  <p>...text and stuff...</p>
  <a href="...">Read on! &rarr;</a>
  <div class="meta">
    <div class="date">4/21/2011<span>
    <a href="...">13 comments<a>
  </div>
</article>
```

```
article:after {
  content: "";
  position: absolute;
  top: 0;
  left: 0;
  width: 0;
  height: 0;
  border-top: 10px solid #E6E2DF;
  border-left: 10px solid #E6E2DF;
  border-bottom: 10px solid #D9D3CF;
  border-right: 10px solid #D9D3CF;
}
```

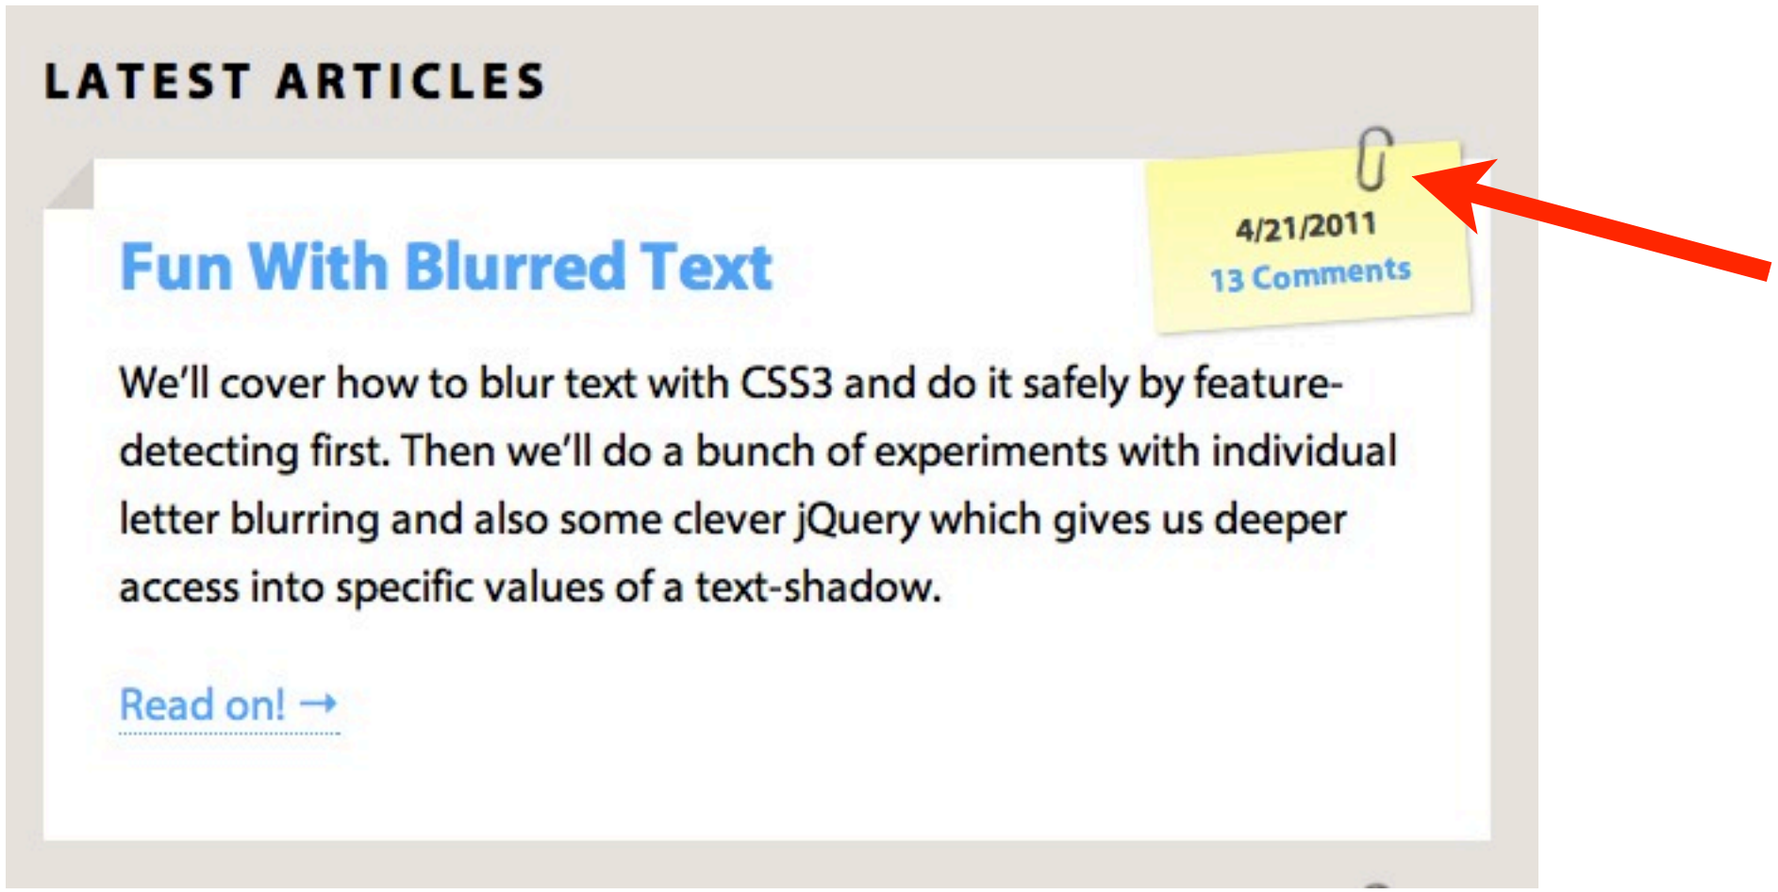


```
<article>
  <h2>Fun with Blurred Text</h2>
  <p>...text and stuff...</p>
  <a href="...">Read on! &rarr;</a>
  <div class="meta">
    <div class="date">4/21/2011<span>
    <a href="...">13 comments<a>
  </div>
</article>
```

```
.meta:before {
  content: url(images/paperclip.png);
  position: absolute;
  top: -10px;
  left: 80px;
}
```

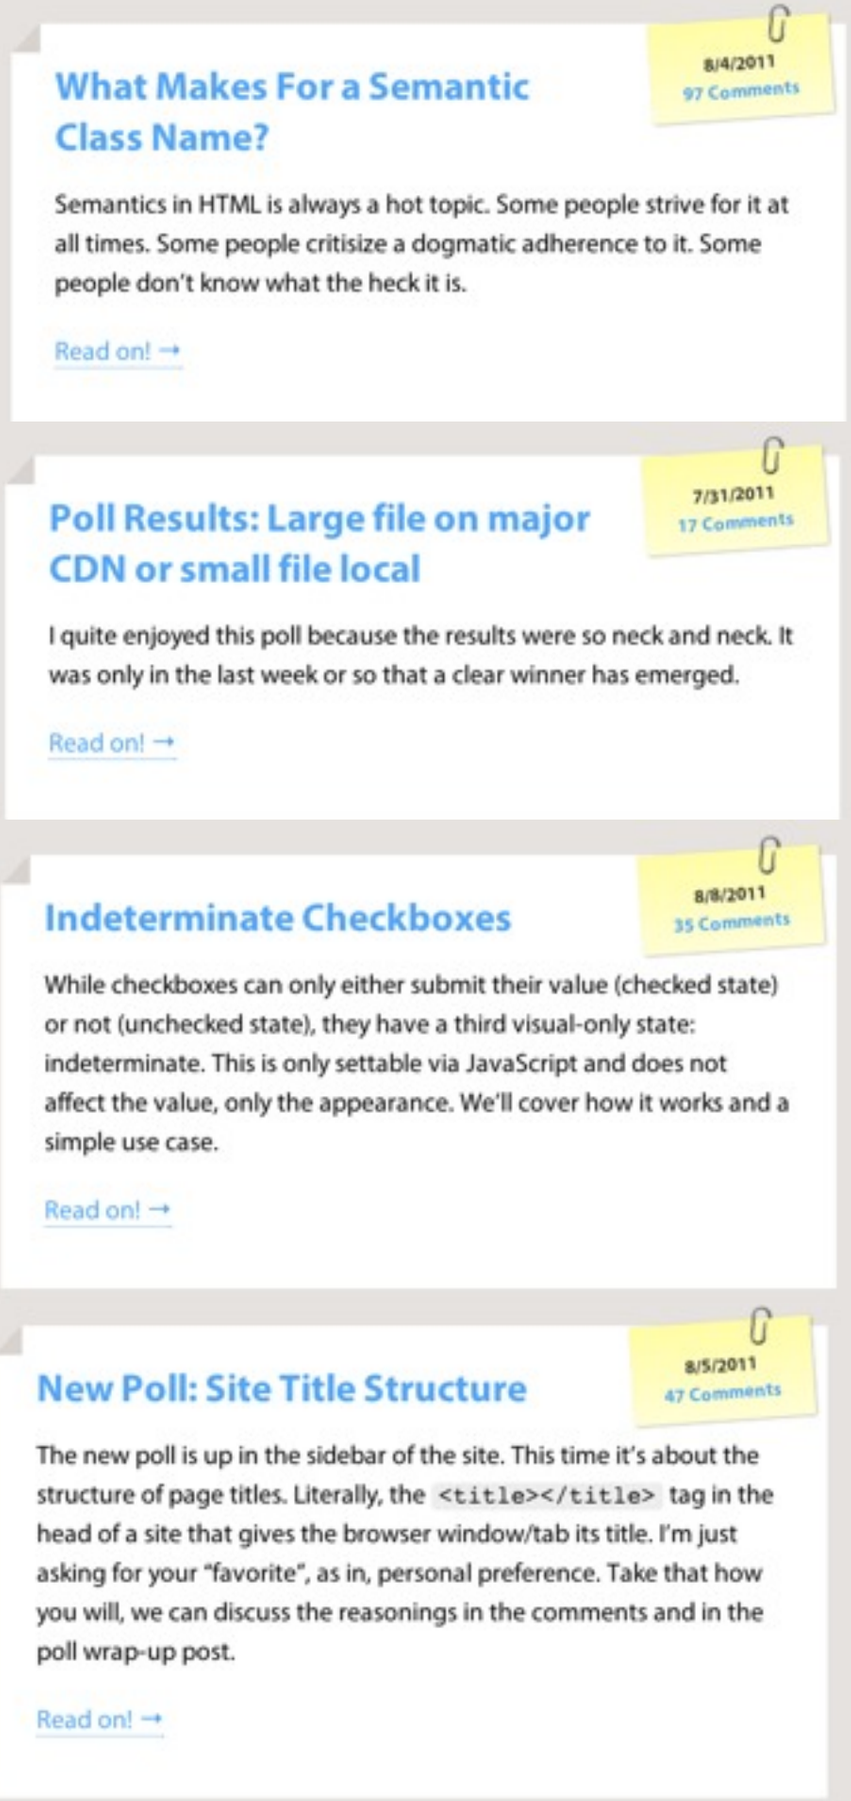

Heavy, non-semantic markup extra sucks inside "The Loop", as it is multiplied.

Florian
08/09/2011

Whydid you use .prop() instead of .attr() ?
Feature Unfeature Bury Unbury

Louis
08/09/2011 (EDIT)

I'm not an expert in this area — `.prop()` is new to me — but here's what the documentation says:

> " The difference between attributes and properties can be important in specific situations. Before jQuery 1.6, the `.attr()` method sometimes took property values into account when retrieving some attributes, which could cause inconsistent behavior. As of jQuery 1.6, the `.prop()` method provides a way to explicitly retrieve property values, while `.attr()` retrieves attributes. "

Feature Unfeature Bury Unbury

http://wordpress.org/extend/plugins/feature-comments/

```
<li class="comment">
    yadda yadda yadda
</li>
```

... click “feature” ...

```
<li class="comment featured">
    yadda yadda yadda
</li>
```

```
.featured:after {
    content: url(images/icon-goldstar.png);
    position: absolute;
    top: -16px;
    right: -12px;
}
```

Florian
08/09/2011

Whydid you use .prop() instead of .attr() ?
Feature Unfeature Bury Unbury

Louis
08/09/2011 (EDIT)

I'm not an expert in this area — `.prop()` is new to me — but here's what the documentation says:

> " The difference between attributes and properties can be important in specific situations. Before jQuery 1.6, the `.attr()` method sometimes took property values into account when retrieving some attributes, which could cause inconsistent behavior. As of jQuery 1.6, the `.prop()` method provides a way to explicitly retrieve property values, while `.attr()` retrieves attributes. "

Feature Unfeature Bury Unbury

Self!

You know what would be neat?

You ***fade in*** pseudo elements on hover.

TOTAL EPIC FRICKING DISASTER

You can’t animate
or transition
pseudo elements.

But WAIT!
You totally can
in Firefox 4+

HTML

```
<a href="#mmm" data-tooltip="is hot.">
 Your mom
</a>
```

CSS

```
a:after {
  content: attr(data-tooltip);
  position: absolute;
  bottom: 130%;
  left: 20%;
  background: #ffcb66;
  padding: 5px 15px;
  white-space: nowrap;
}
```

http://jsbin.com/pseudotooltip/4/edit

ellentesque habitant morbi tristique senectus et netus e
alesuada fames ac turpis egestas. Vestibulum tortor q
ugiat vitae, ultricies eget, tempor sit amet, ante. Done
bero sit amet quam egestas semper. Aenean ultricies m
st. Mauris placerat eleif is hot. . Quisque sit amet est e
llamcorper pharetra. Your mom erat wisi, condimentu
ommodo vitae, ornare sit amet, wisi. Aenean fermentu

get tincidunt condimentum, eros ipsum rutrum orci, sa
empus lacus enim ac dui. Donec non enim in turpis pul
acilisis. Ut felis. Praesent dapibus, neque id cursus fau
ortor neque egestas augue, eu vulputate magna eros eu
liquam erat volutpat. Nam dui mi, tincidunt quis, accu
orttitor, facilisis luctus, metus

HTML

```
<a href="#snarf" data-tooltip="is hot.">
 Your mom
</a>
```

CSS

```
a:after {
  content: attr(data-tooltip);
  position: absolute;
  bottom: 150%;
  left: 20%;
  background: #ffcb66;
  padding: 5px 15px;
  white-space: nowrap;
  opacity: 0;
  -moz-transition: opacity 0.5s ease;
  -webkit-transition: opacity 0.5s ease;
  -o-transition: opacity 0.5s ease;
}
a:hover:after {
  opacity: 1;
  bottom: 130%;
}
```

ultricies eget, tempor sit amet, ante. Don
quam egestas semper. Aenean ultricies
acerat eleifend leo. Quisque sit amet est
haretra. Your mom erat wisi, condimentu
e, ornare sit amet, wisi. Aenean ferment

condimentum, eros ipsum rutrum orci, s
enim ac dui. Donec non enim in turpis pu
lis. Praesent dapibus, neque id cursus fa
gestas augue, eu vulputate magna eros e
volutpat. Nam dui mi, tincidunt quis, acc

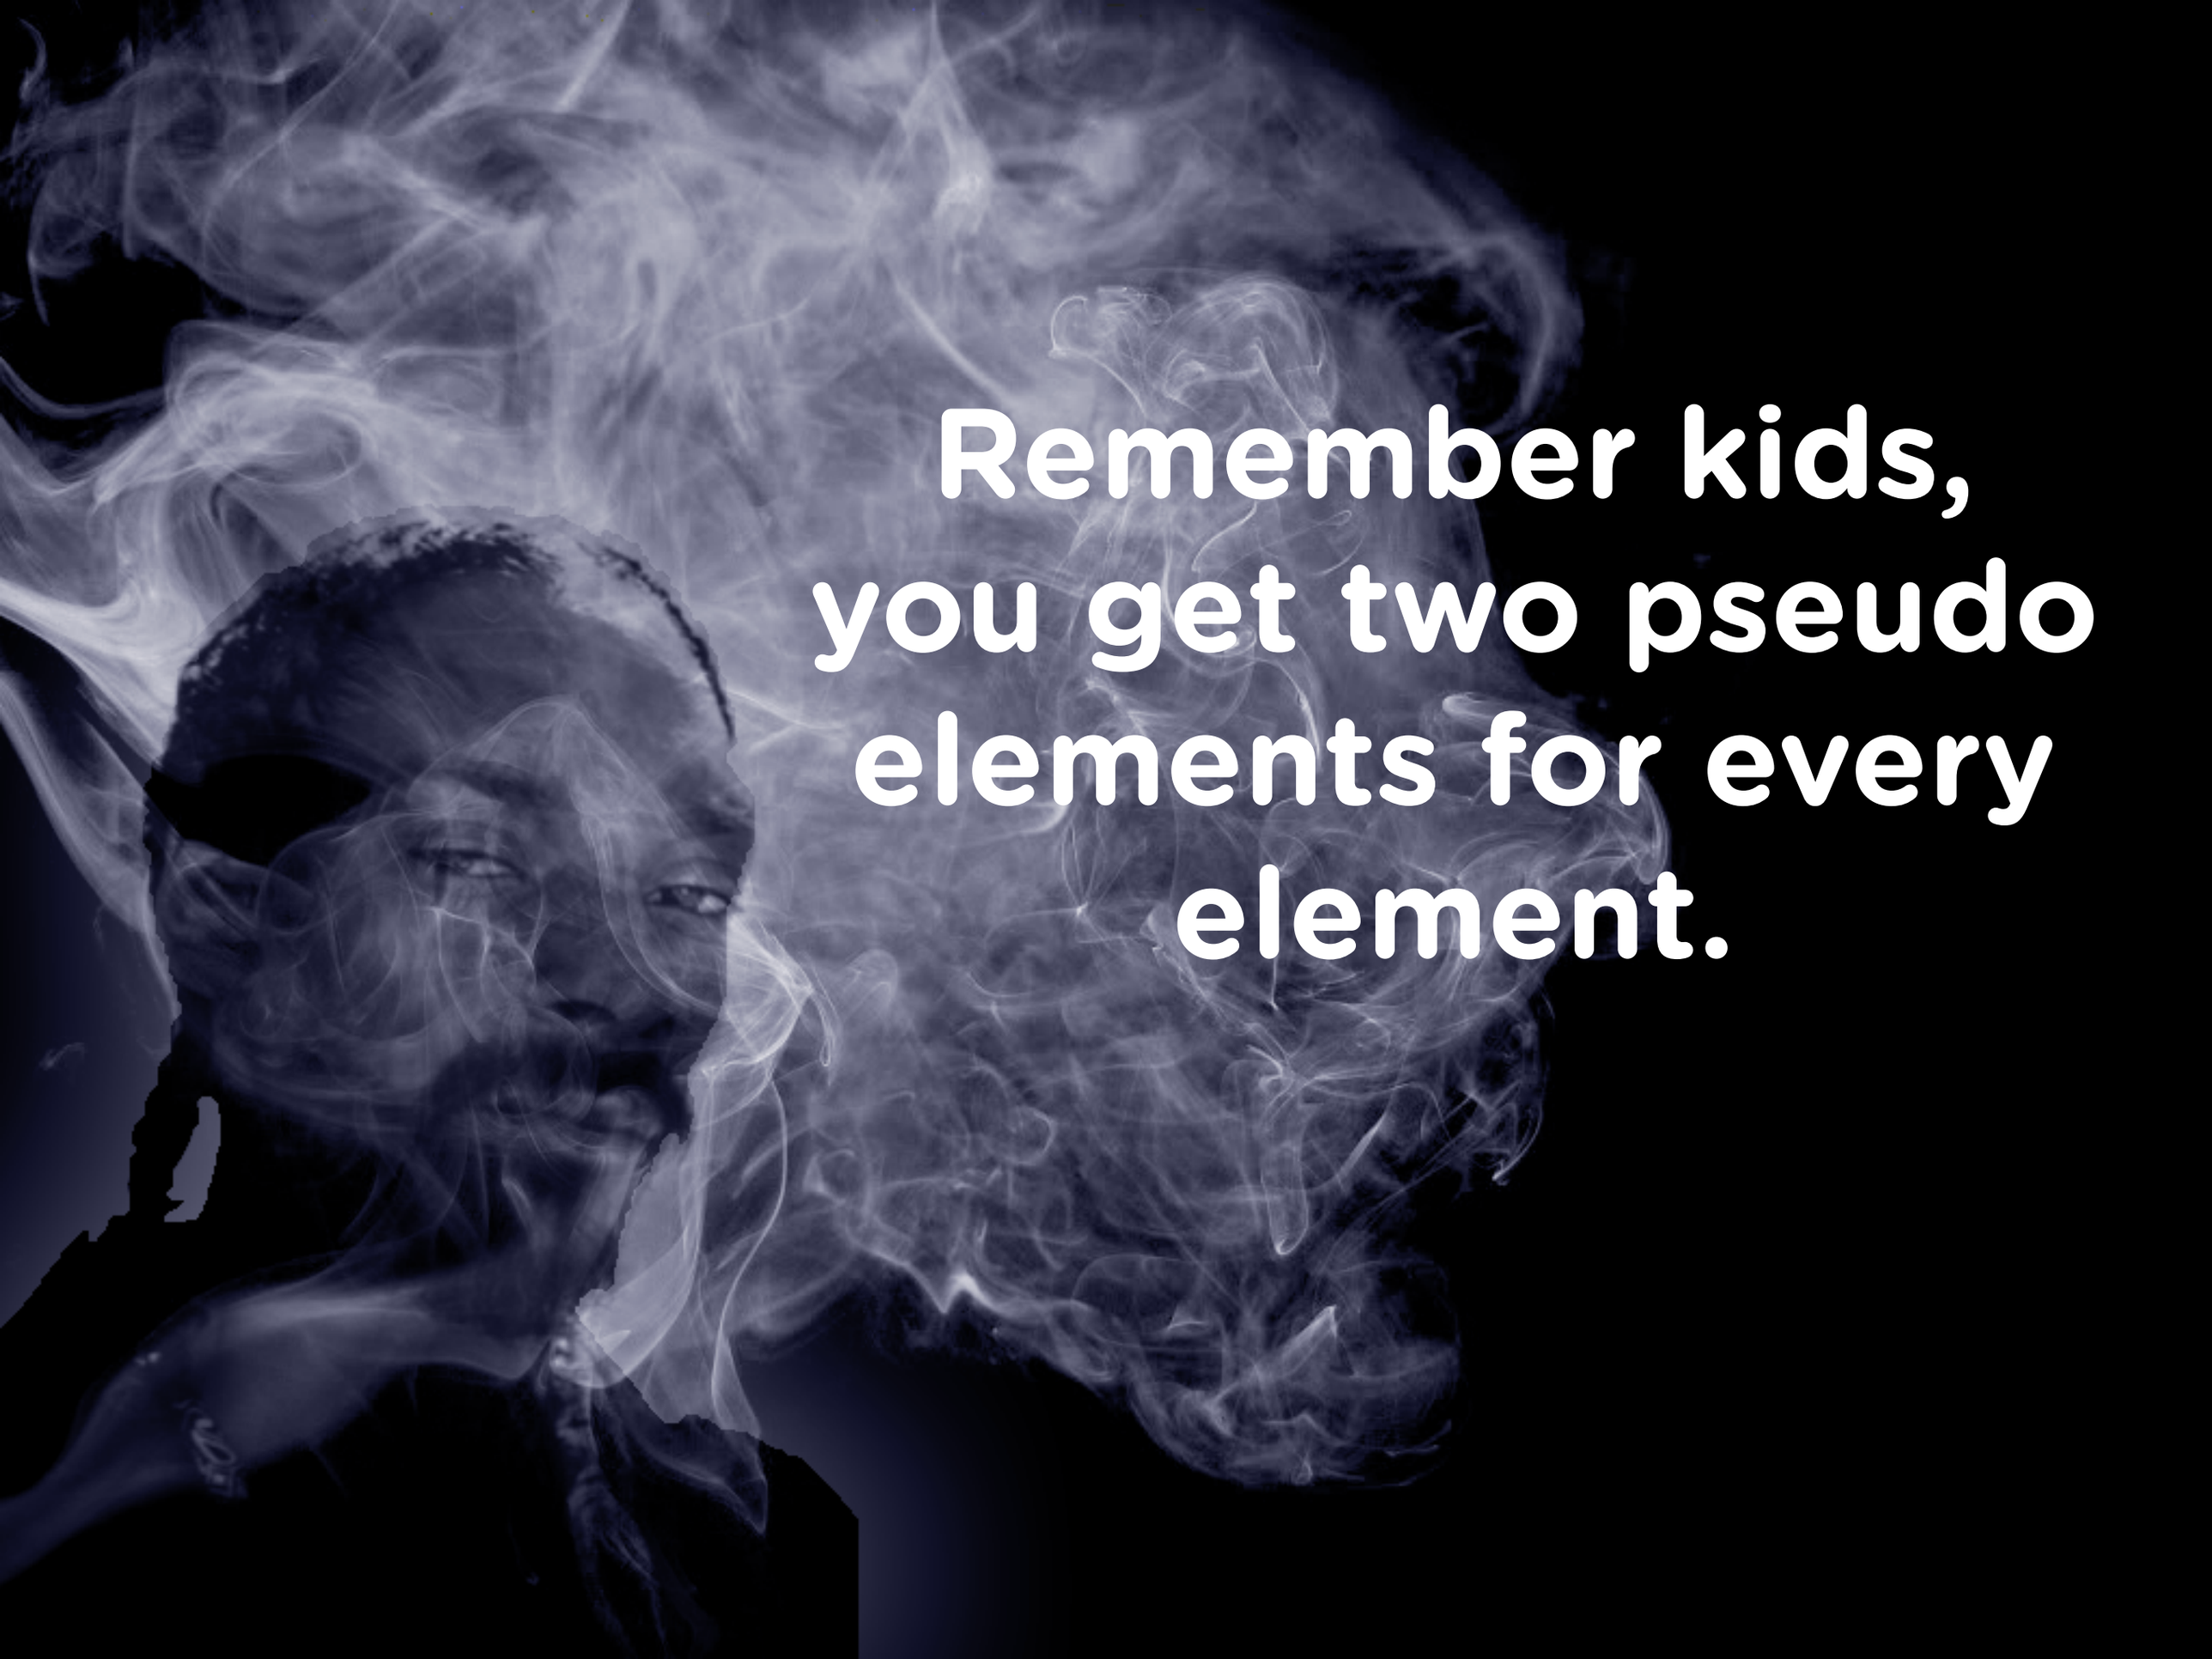
Remember kids,
you get two pseudo
elements for every
element.

CSS

```
a {
  position: relative;
}
a:after {
  content: attr(data-tooltip);
  bottom: 130%;
  left: 20%;
  background: #ffcb66;
  padding: 5px 15px;
  color: black;
  -webkit-border-radius: 10px;
  -moz-border-radius   : 10px;
  border-radius        : 10px;
  white-space: nowrap;
}
a:after, a:before {
  position: absolute;
   -webkit-transition: all 0.4s ease;
  -moz-transition   : all 0.4s ease;
  -o-transition     : all 0.4s ease;
  opacity: 0;
}
```

```
a:before {
  content: "";
  width: 0;
  height: 0;
  border-top: 20px solid #ffcb66;
  border-left: 20px solid transparent;
  border-right: 20px solid transparent;
  left: 30%;
  bottom: 90%;
}
a:hover:after {
  bottom: 100%;
}
a:hover:before {
  bottom: 70%;
}
a:hover:after, a:hover:before {
  opacity: 1;
}
```

ames ac turpis egestas. Vestibulum tortor q
, ultricies eget, tempor sit amet, ante. Don
m egestas semper. Aenean ultricies mi vita
erat eleifend leo. Quisque sit amet est et sa
pharetra. Your mom erat wisi, condimentu
tae, ornare sit amet, wisi. Aenean ferment
ndimentum, eros ipsum rutrum orci, sagitti
c dui. Donec non enim in turpis pulvinar f
nt dapibus, neque id cursus faucibus, torto
le, eu vulputate magna eros eu erat. Aliqua

You can't talk about Pseudo Elements
without talking about...

Nicolas
"Dr. Pseudo Element"
Gallagher

http://nicolasgallagher.com/

@necolas

Multiple boxes from one HTML element allow
for multiple backgrounds and borders

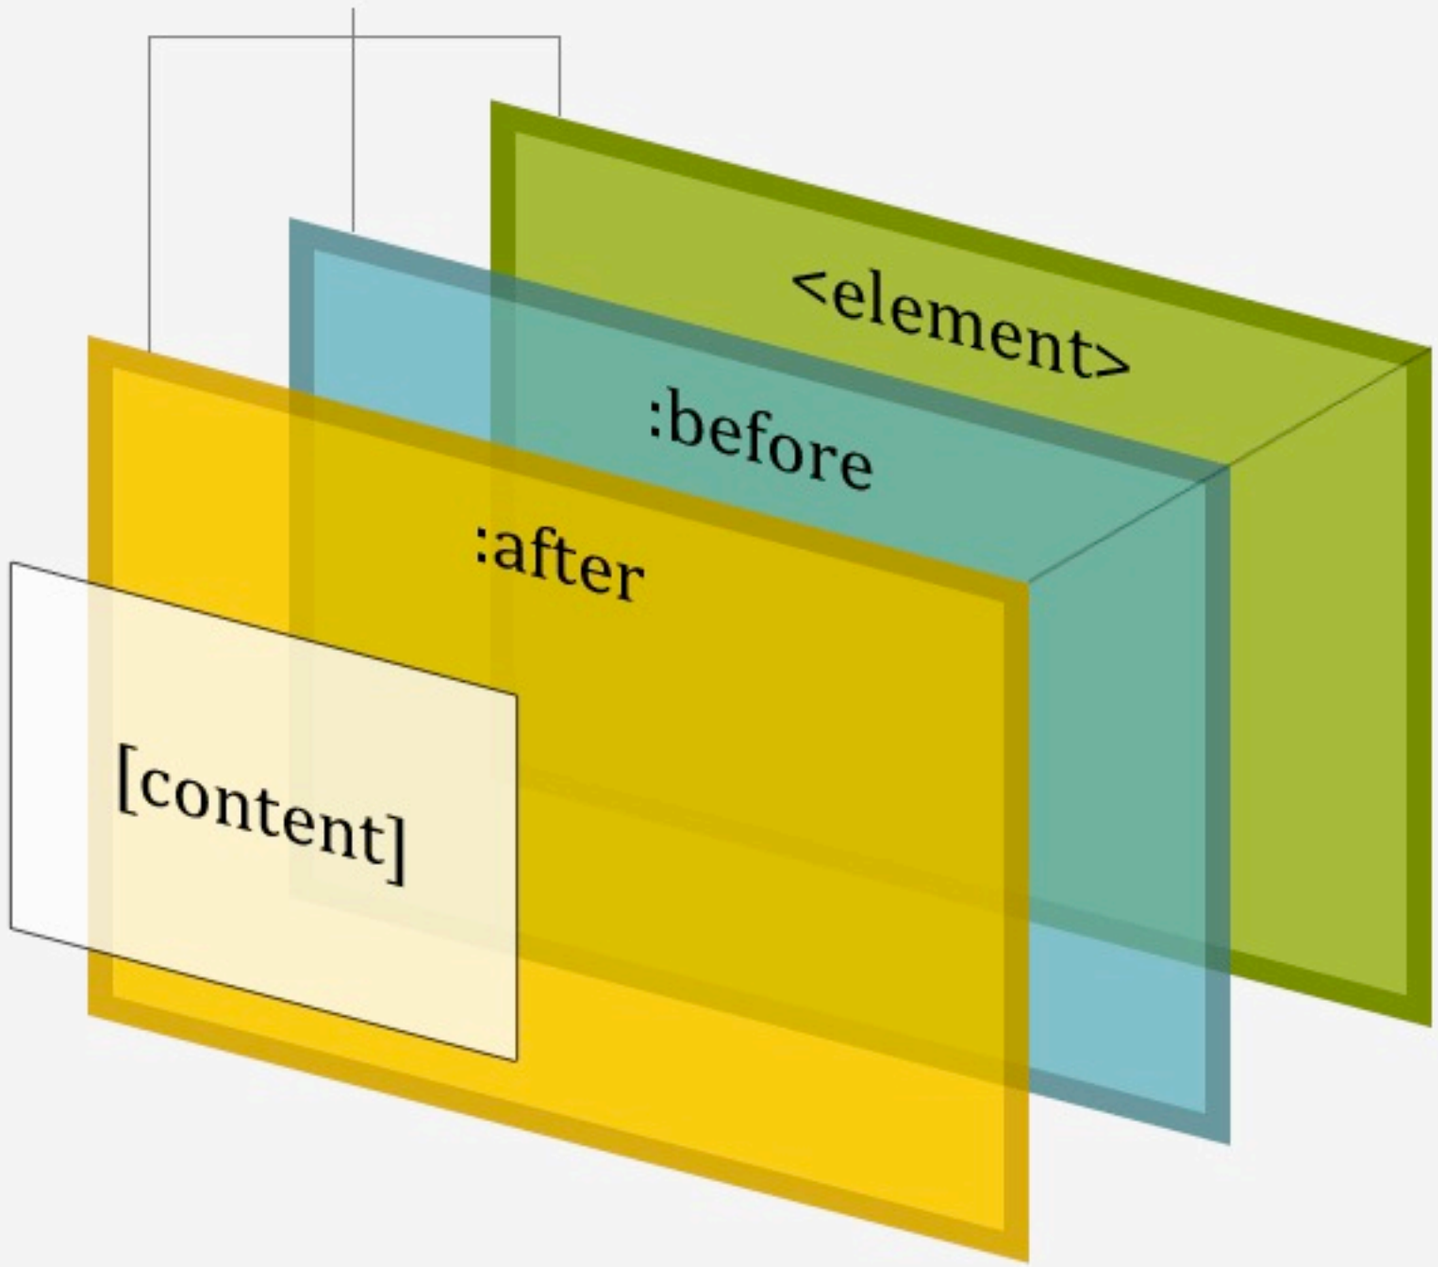

```
body {
  background: url(background.png) -15% 0 repeat-x;
}
body:before {
  background: url(midground.png) 35% 0 repeat-x;
}
body:after {
  background: url(foreground.png) 65% 0 repeat-x;
}
```

```
body:after, body:before {
  content: “”;
  position: absolute;
  top: 0; right: 0; left: 0;
  height: 100px;
}
```

Shapes!

These are easy.

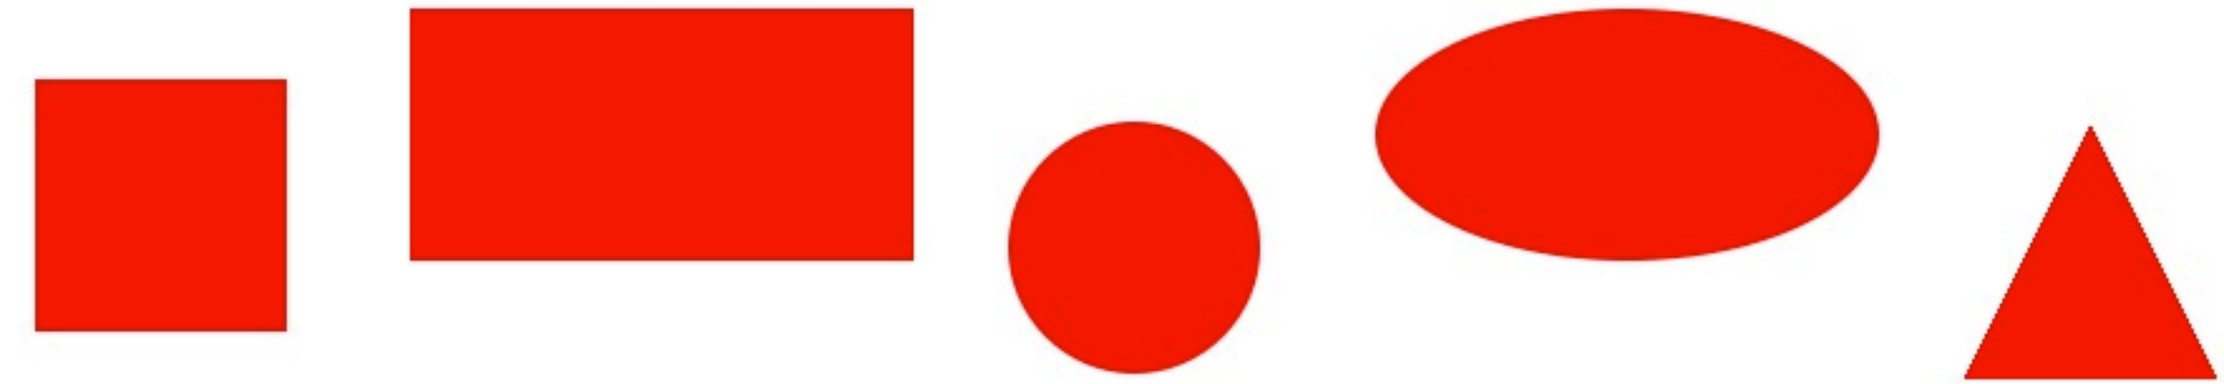

These are less easy.

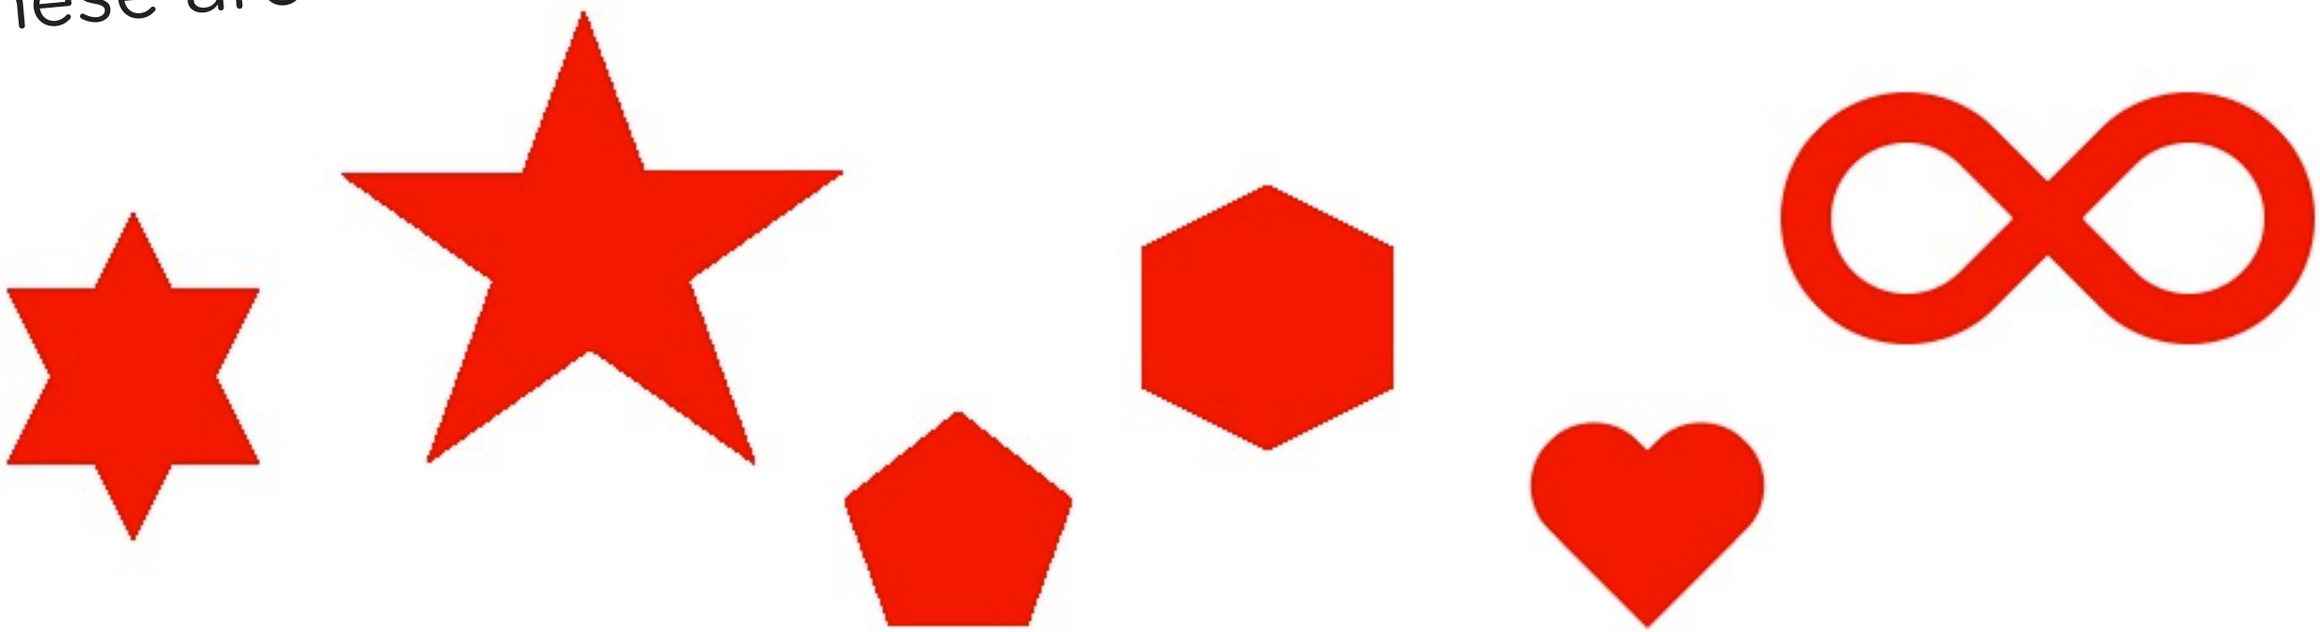



```
.star {
    width: 0;
    height: 0;
    border-left: 50px solid transparent;
    border-right: 50px solid transparent;
    border-bottom: 100px solid red;
    position: relative;
}
.star:after {
    width: 0;
    height: 0;
    border-left: 50px solid transparent;
    border-right: 50px solid transparent;
    border-top: 100px solid red;
    position: absolute;
    content: "";
    top: 30px;
    left: -50px;
}
```

The Shapes of CSS

http://css-tricks.com/examples/ShapesOfCSS/

Google

The Shapes of CSS

All of the below use only a single HTML element. Any kind of CSS goes, as long as it's supported in at least one browser.

Square

```
#square {
        width: 100px;
        height: 100px;
        background: red;
}
```

http://css-tricks.com/examples/ShapesOfCSS/

Fancy View Source

Search
Comment
Like
Add
Remove
Delete
Add
Remove
Delete
Report
Trash
Lock
Unlock
Update status
Retweet
Save
Edit
Download
Forward
Back
Up
Down
Forward
Back
Up
Down
Forward
Up

Home
Photo
Video
Music
Call
Call in progress
Tags
RSS
Email
Profile
File
Folder
List view
Permalink
History
Tools
MP3 Player
Headphones
Ribbon
Views
Location
Info
Help
Pie chart
Success
Success (alt)
Warning

Power
Play
Stop
Pause
Play
Stop
Pause
Volume
Volume on
Mute
Volume up
Volume down
Mic
Fast forward
Fast rewind
Next track
Previous track
Repeat
Expand
Shrink
Toggle video size
Pop out
Enlarge
Full-screen
Exit full-screen
Eject

http://nicolasgallagher.com/pure-css-gui-icons/demo/

Remember, CSS **TWO** not THREE

Browser Support

CSS-Tricks
97%

85%

Other tech
92%

3.5+

3.0- positioning issues

1+

9+

8 :: / :hover / z-index

7-

1.3+

6+

http://css-tricks.com/browser-support-pseudo-elements/

Here's what we learned:

1) What they are

2) How to use them (syntax)

3) Why they are cool (theoretically)

4) Why they are cool (in practice)

5) The Future?

The CSS3 Spec - We need to use them more - Transitions

MORE

http://css-tricks.com/9516-pseudo-element-roundup/

Photos

http://www.flickr.com/photos/wolfgangstaudt/2252688630/

http://www.flickr.com/photos/webel/347801397/

http://web.archive.org/web/20051111095409/http://wrgis.wr.usgs.gov/dds/dds-39/album.html

Type

Gotham font family by **Hoefler & Frere-Jones**

Other Excellent Relevant Links

http://www.merttol.com/articles/web/code/introduction-to-css-escape-sequences.html

http://www.viget.com/inspire/css-generated-content/

http://css-tricks.com/video-screencasts/94-intro-to-pseudo-elements/

Thanks!

http://bit.ly/pseudos

Still want more?

Combining with media queries

CSS

```
@media (min-width: 1024px) {

li:nth-child(1):before {
  content: “Name: “; }

li:nth-child(2):before {
  content: “Email: “; }

li:nth-child(3):before {
  content: “Twitter: “; }

li:before {
  display: inline-block;
  width: 100px;
  text-align: right; }

}
```

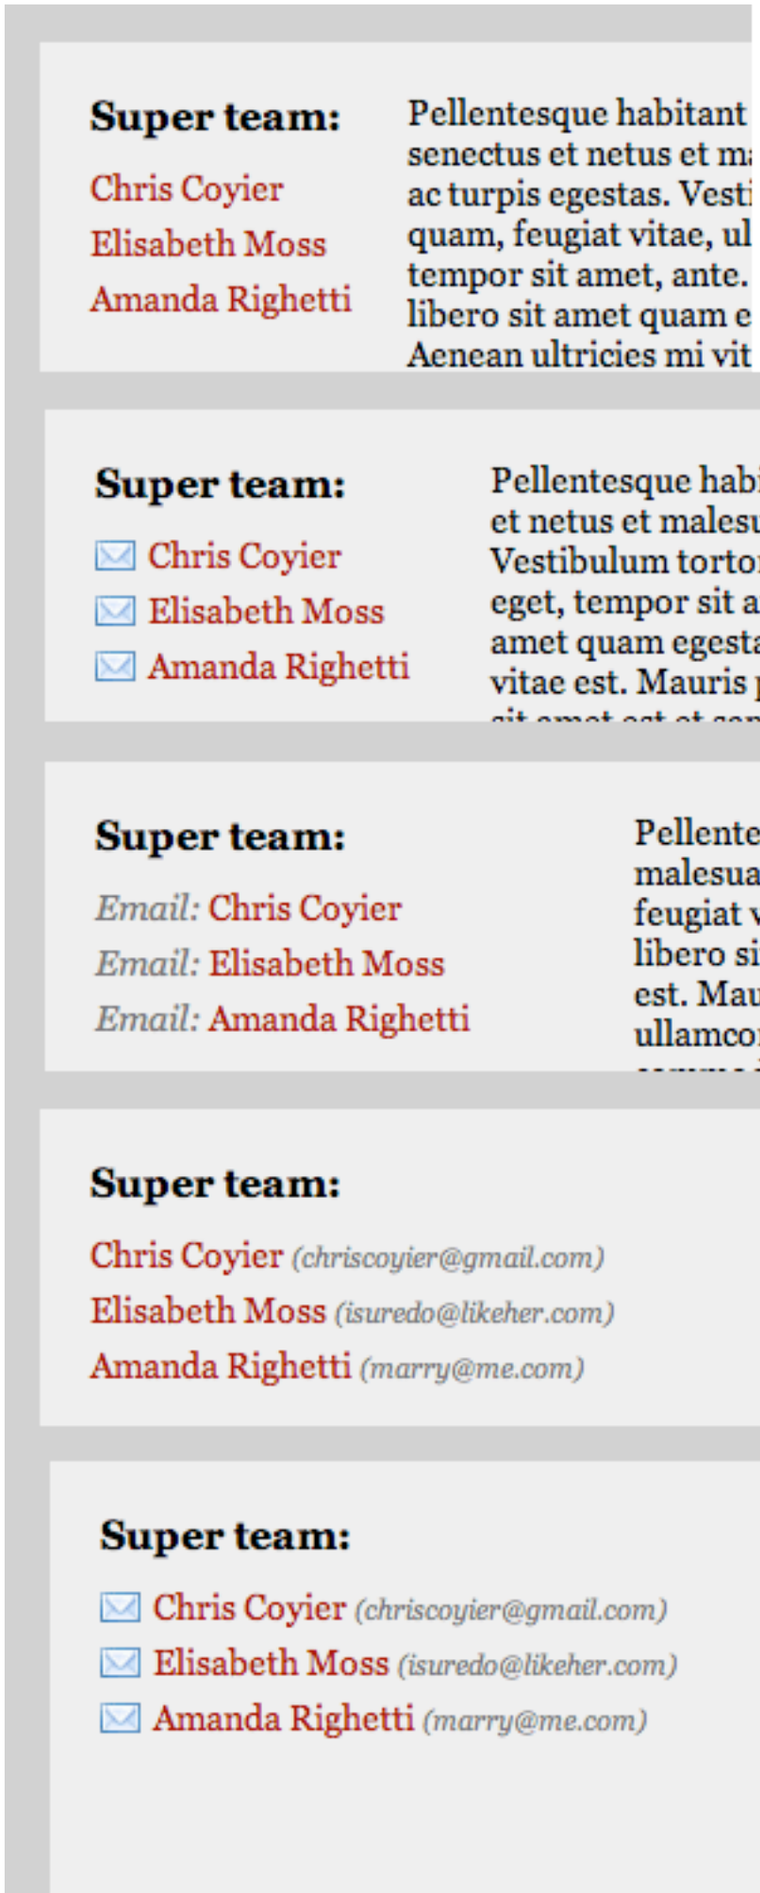

mobile portrait

mobile landscape

tablet

small monitor

large monitor

http://css-tricks.com/css-media-queries/

Super team:

Chris Coyier *(chriscoyier@gmail.com)*
Elisabeth Moss *(isuredo@likeher.com)*
Amanda Righetti *(marry@me.com)*

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas semper. Aenean ultricies mi vitae est. Mauris placerat eleifend leo. Quisque sit amet est et sapien ullamcorper pharetra. Vestibulum erat wisi, condimentum sed, commodo vitae, ornare sit amet, wisi. Aenean fermentum, elit eget tincidunt condimentum, eros ipsum rutrum orci, sagittis tempus lacus enim ac dui. Donec non enim in turpis pulvinar facilisis. Ut felis. Praesent dapibus, neque id cursus faucibus, tortor neque egestas augue, eu vulputate magna eros eu erat. Aliquam erat volutpat. Nam dui mi, tincidunt quis, accumsan porttitor, facilisis luctus, metus

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas semper. Aenean ultricies mi vitae est. Mauris placerat eleifend leo. Quisque sit amet est et sapien ullamcorper pharetra. Vestibulum erat wisi, condimentum sed, commodo vitae, ornare sit amet, wisi. Aenean fermentum, elit eget tincidunt condimentum, eros ipsum rutrum orci, sagittis tempus lacus enim ac dui. Donec

SUPER CSS SUPER CHALLENGE

Create the navigation tabs below with **no images**, assuming this markup:

```
<ul>
  <li><a href="#">One</a></li>
  <li><a href="#">Two</a></li>
  <li><a href="#">Three</a></li>
</ul>
```

Create the below navigation with no images, assuming this markup:

```
<ul>
  <li><a href="#">One</a></li>
  <li><a href="#">Two</a></li>
  <li><a href="#">Three</a></li>
</ul>
```

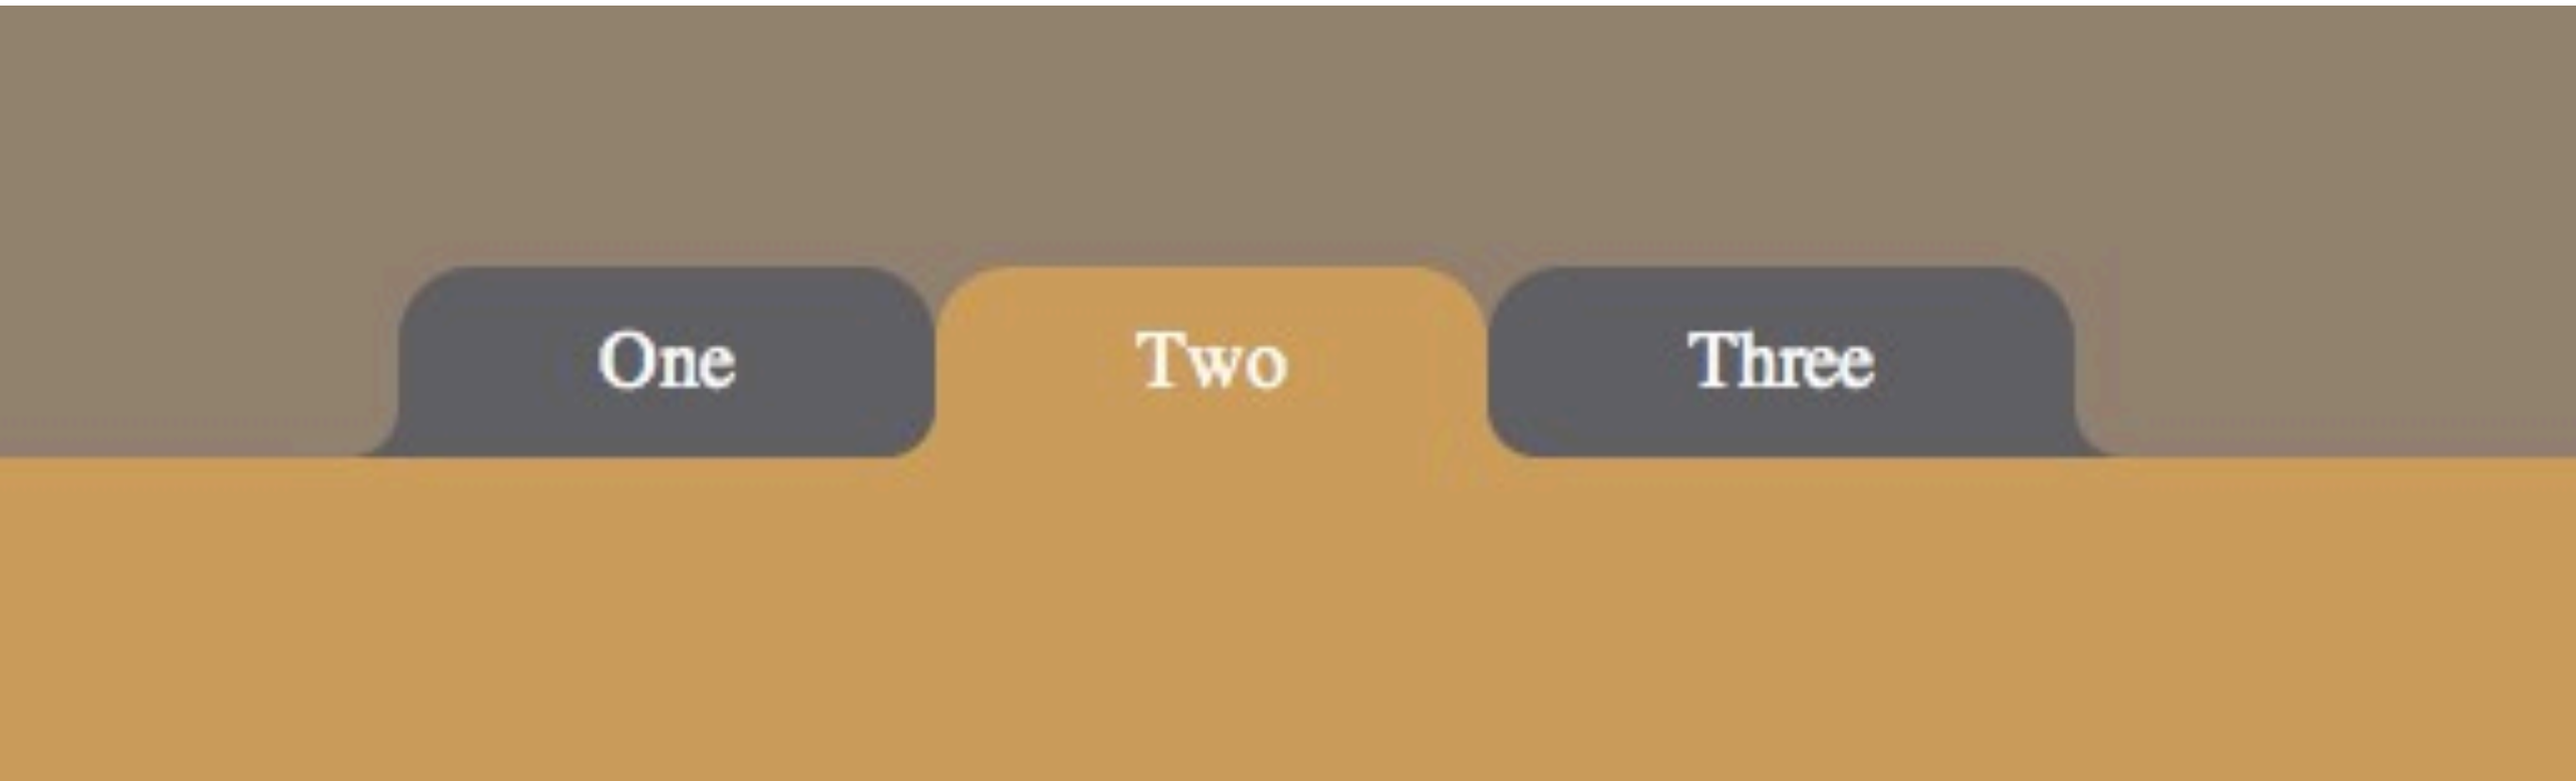



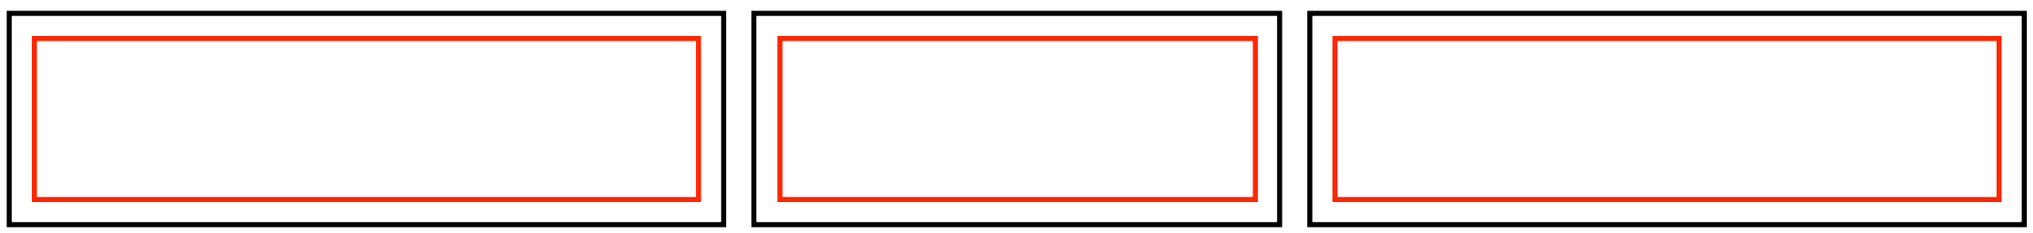

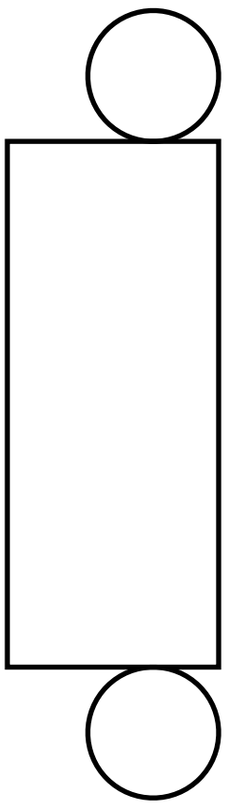

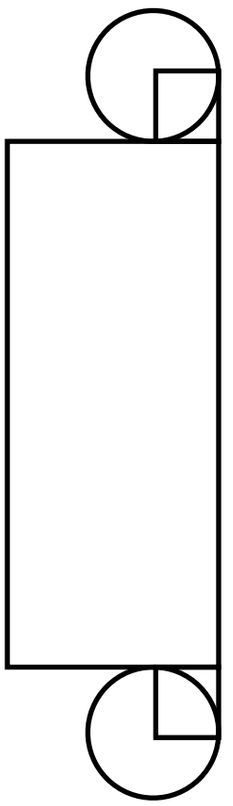

http://jsbin.com/super-css-super-challenge/